

| | | |
|---|---|---|
| **B102SL20Y** | | |
| **Product** | | Control Unit |
| **Model** | | Selector |
| **Type** | | Stay Put Illuminated |
| **Label/Position** | | (0-I) 60° |
| **Contact** | | 1NO+1NC |
| **Color** | | Green |
| **Dia** | | 22 mm |
| **Current** | **Ie** | 4 A (250V AC) |
| **Usage Category** | | AC 15 |
| **Mechanical Life** | **Min Qty** | 500000 |
| **Electrical Life** | **Min Qty** | 100000 |
| **Operating Frequency** | **On-Off/Hour** | Mech. 3000 Elec. 1200 |
| **Insulation Voltage** | **Ui** | 300V |
| **Impulse Withstand Voltage** | **Uimp** | 2.5 kV |
| **Dielectric Strength (Body-Contact)** | | 2.500V AC |
| **Dielectric Strength (Contact-Contact)** | | 1.500V AC |
| **Isolation Resistance** | | 10 MΩ min. (500V DC) |
| **Operating Temperature** | | -15 / + 80 °C |
| **Pollution Degree** | | 3 |
| **Protection Degree** | | IP50 |
| **Contact Material** | | AgNi |
| **Cable Section** | | 1.5-2.5 mm² |
| **Screw Torque** | | 1,5 Nm |
| **Short Circuit Breaking Capacity** | **Ics** | 1 kA |
| **Production Time** | | 31.12.1899 00:00:00 |
| **Serial** | | B Series Plastic |
| **Specifications** | Non-flammable V0 PA6.6 contact blocks | |
| | Various illumination contact blocks availablity | |


| | |
|---|---|
| | Variety of products for all areas of application |
| **Standards / Certificates** | IEC 60947-5-1 TS EN 60947-5-1 UL 508 VDE 0660 |
| |  |

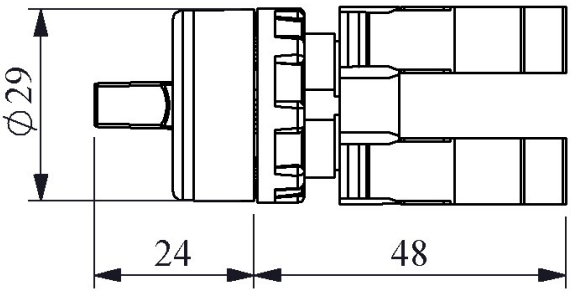


Montaj Ölçüsü Ø22.4 ±0.2 mm

Devre Şeması

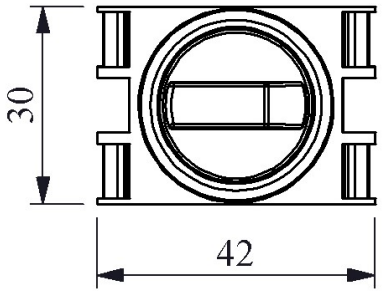


Pozisyon

