

B190SL30Y		
Operating Current		5-20 mA (12-30V AC/DC)
Operational Frequency		50 Hz
Operational Voltage		12-30V AC/DC
Product		Control Unit
Model		Selector
Type		Stay Put Illuminated
Label/Position		(II-0-I) 60°
Contact		1NO
Color		Green
Illumination		with LED
Dia		22 mm
Current	**Ie**	4 A (250V AC)
Usage Category		AC 15
Power Consumption		0.7 W
Mechanical Life	**Min Qty**	500000
Electrical Life	**Min Qty**	100000
Operating Frequency	**On-Off/Hour**	Mech. 1200 Elec. 1200
Insulation Voltage	**Ui**	300V
Impulse Withstand Voltage	**Uimp**	2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-15 / + 70 °C
Pollution Degree		3
Protection Degree		IP50
Contact Material		AgNi
Cable Section		1.5-2.5 mm²
Screw Torque		1,5 Nm

Short Circuit Breaking Capacity	**Ics**	1 kA
Production Time		31.12.1899 00:00:00
Serial		B Series Plastic
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availablity	
	Variety of products for all areas of application	
Standards / Certificates	IEC 60947-5-1 TS EN 60947-5-1 UL 508 VDE 0660	




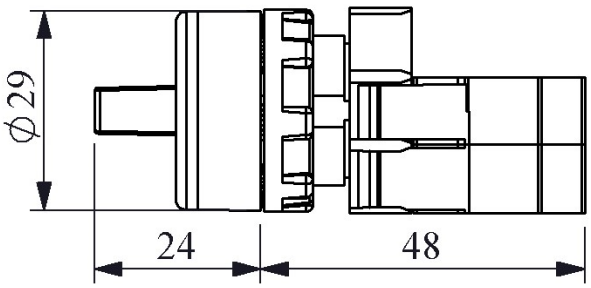

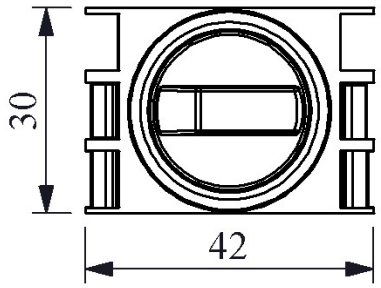

Montaj Ölçüsü Ø22.4 ±0.2 mm

Devre Şeması

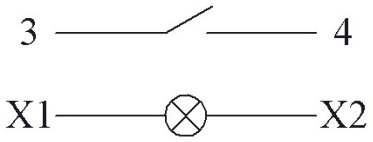

Pozisyon

