



BPR05K		
Product		Potentiometer
Dia		22 mm
Dielectric Strength (Contact-Contact)		1750 Vrms
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-15 / + 80 °C
Pollution Degree		3
Protection Degree		IP65
Cable Section		0.75-1.5 mm2
Screw Torque		1,5 Nm
Maximum Current		17,30 mA
Maximum Power		1,5 W (70ºC)
Resistive Value		5 kΩ
Spin Angle		270°
Production Time		31.12.1899 00:00:00
Serial		B Series Plastic
Specifications	Non-flammable V0 PA6.6	
	Variety of impedances	
	IP65 protection from front side	
Standards / Certificates	IEC 60393-1	

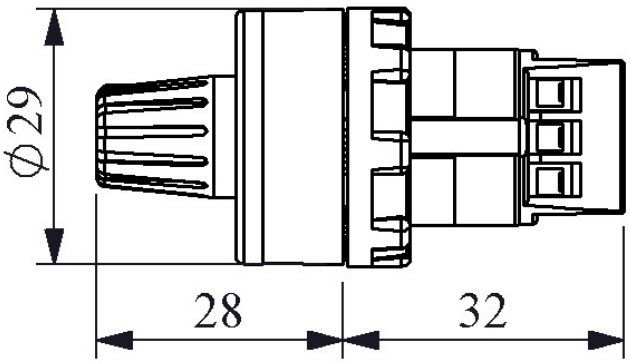



Montaj Ölçüsü Ø22.4 ±0.2 mm

Devre Şeması

