
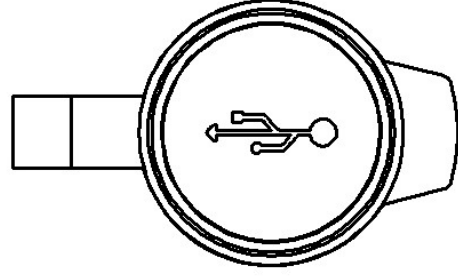



BUSB

Product	USB
Type	1,5 mt Prefabricated cable
Dia	22 mm
Dielectric Strength (Body-Contact)	100V AC
Dielectric Strength (Contact-Contact)	100V AC
Isolation Resistance	100 MΩ
Operating Temperature	-25 / + 85 °C
Storage Temperature	USB-A
Pollution Degree	3
Protection Degree	IP65
Contact Resistance	50 mΩ
Production Time	31.12.1899 00:00:00
Serial	B Series Plastic
Voltage	10 N
Enclosure	1500
Specifications	Non-flammable V0 PA6.6
	IP65 protection from front side

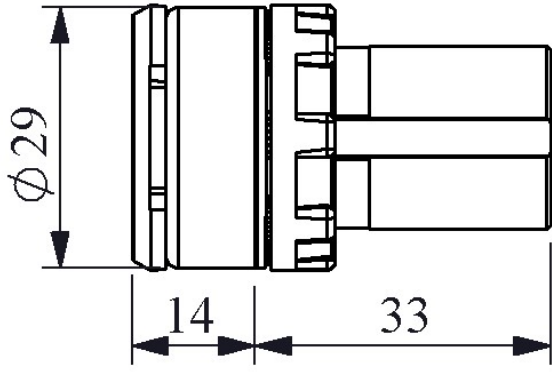

Montaj Ölçüsü $\text{Ø}22.4 \pm 0.2 \text{ mm}$

Kablo Boyu 1 m