


BUSB		
Product		USB
Type		1,5 mt Prefabricated cable
Dia		22 mm
Dielectric Strength (Body-Contact)		100V AC
Dielectric Strength (Contact-Contact)		100V AC
Isolation Resistance		100 MΩ
Operating Temperature		-25 / + 85 °C
Storage Temperature		USB-A
Pollution Degree		3
Protection Degree		IP65
Contact Resistance		50 mΩ
Production Time		31.12.1899 00:00:00
Serial		B Series Plastic
Voltage		10 N
Enclosure		1500
Specifications	Non-flammable V0 PA6.6	
	IP65 protection from front side	

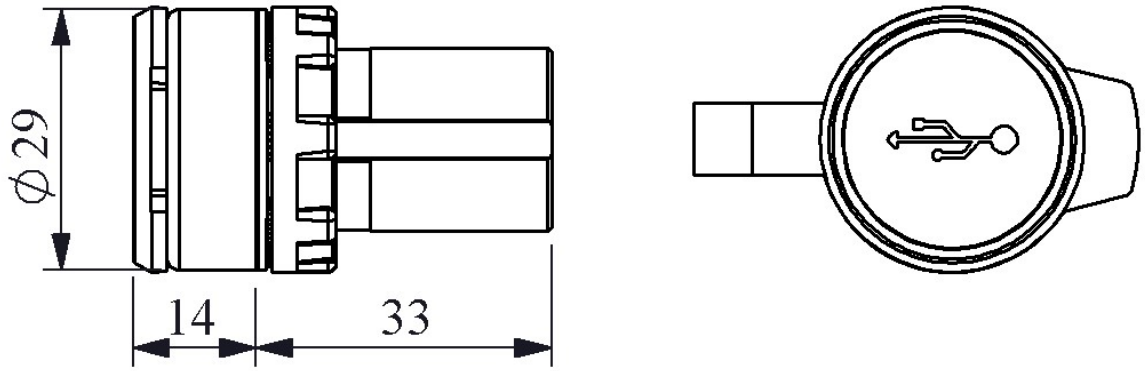

Montaj Ölçüsü Ø22.4 ±0.2 mm

Kablo Boyu 1 m