





CM070XM		
Operating Current		5-20 mA (12-30V AC/DC)
Operational Frequency		50 Hz
Operational Voltage		12-30V AC/DC
Product		Pilot
Color		Blue
Illumination		with LED
Dia		22 mm
Power Consumption		0.7 W
Insulation Voltage	**Ui**	300V
Operating Temperature		-15 / + 65 °C
Pollution Degree		3
Protection Degree		IP50
Cable Section		1.5-2.5 mm2
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		CM Series Metal
Electrical Life	**Min Hour**	10000
Specifications	Die cast metal construction for harsh environment, corrosion-resistant chromate plating	
	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availablity	
	Variety of products for all areas of application	
	IP65 protection from front side	
Standards / Certificates	TS EN 60947-5-1	



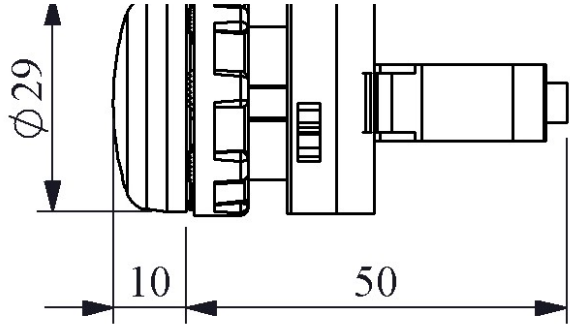

Montaj Ölçüsü Ø22.4 ±0.2 mm

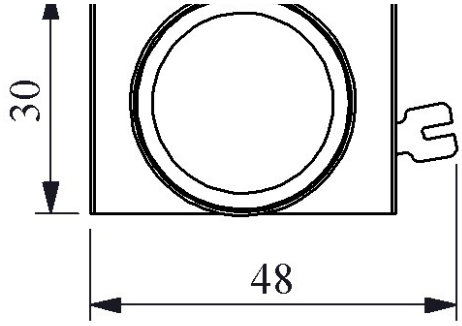

Devre Şeması

