


CM0P0XM


| | | |
|--------------------------|---|-------------------------|
| Operating Current | | 3-5mA |
| Operational Voltage | | 230V DC |
| Product | | Pilot |
| Color | | Blue |
| Illumination | | with LED |
| Dia | | 22 mm |
| Power Consumption | | 1W |
| Insulation Voltage | Ui | 300V |
| Operating Temperature | | -15 / + 65 °C |
| Pollution Degree | | 3 |
| Protection Degree | | IP50 |
| Cable Section | | 1.5-2.5 mm ² |
| Screw Torque | | 1,5 Nm |
| Production Time | | 31.12.1899 00:00:00 |
| Serial | | CM Series Metal |
| Electrical Life | Min Hour | 10000 |
| Specifications | Die cast metal construction for harsh environment, corrosion-resistant chromate plating | |
| | Non-flammable V0 PA6.6 contact blocks | |
| | Various illumination contact blocks availability | |
| | Variety of products for all areas of application | |
| | IP65 protection from front side | |
| Standards / Certificates | TS EN 60947-5-1 | |





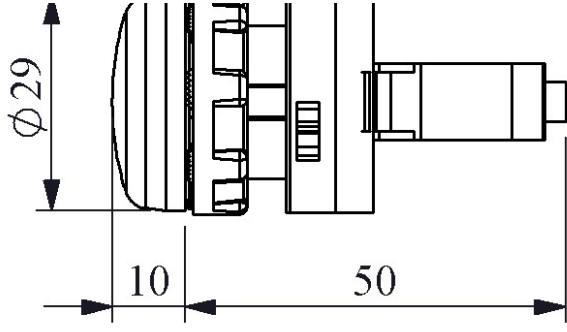

Montaj Ölçüsü $\phi 22.4 \pm 0.2$ mm

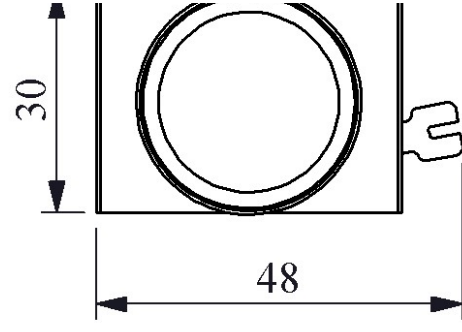

Devre Şeması

