



CM200DHO

Print		(0) Marked
Product		Control Unit
Model		Spring
Type		Flush
Contact		1NC
Color		Black
Dia		22 mm
Current	I _e	4 A (230V AC)
Usage Category		AC 15
Mechanical Life	Min Qty	500000
Electrical Life	Min Qty	100000
Operating Frequency	On-Off/Hour	Mech. 3000 Elec. 1200
Insulation Voltage	U _i	300V
Impulse Withstand Voltage	U _{imp}	2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-15 / + 65 °C
Pollution Degree		3
Protection Degree		IP65
Contact Material		AgNi
Cable Section		1.5-2.5 mm ²
Screw Torque		1,5 Nm
Short Circuit Breaking Capacity	I _{cs}	1 kA
Production Time		31.12.1899 00:00:00
Serial		CM Series Metal
Specifications	Die cast metal construction for harsh environment, corrosion-resistant chromate plating	

	Non-flammable V0 PA6.6 contact blocks			
	Various illumination contact blocks availability			
	Variety of products for all areas of application			
	IP65 protection from front side			
Standards / Certificates	IEC 60947-5-1	TS EN 60947-5-1	UL 508	VDE 0660
   				

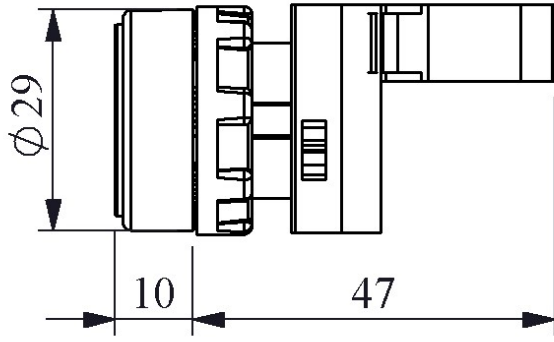

Montaj Ölçüsü $\phi 22.4 \pm 0.2$ mm

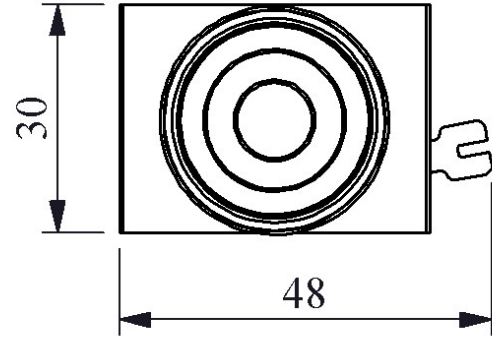

Devre Şeması

