



CP0K0XK		
Operating Current		5-15 mA
Operational Frequency		50 Hz
Operational Voltage		100-230V AC
Product		Pilot
Color		Red
Illumination		with LED
Dia		22 mm
Power Consumption		<4 VA
Insulation Voltage	**Ui**	300V
Operating Temperature		-15 / + 65 °C
Pollution Degree		3
Protection Degree		IP50
Cable Section		1.5-2.5 mm2
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		CP Series Plastic
Electrical Life	**Min Hour**	10000
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availablity	
	Variety of products for all areas of application	
	IP65 protection from front side	
Standards / Certificates	TS EN 60947-5-1	



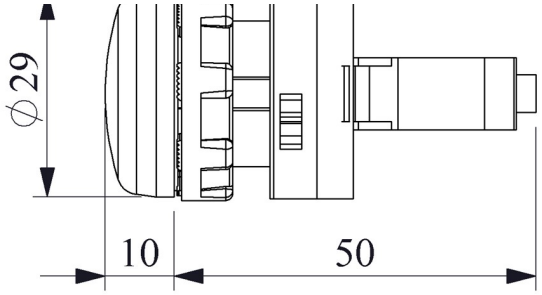

Montaj Ölçüsü Ø22.4 ±0.2 mm

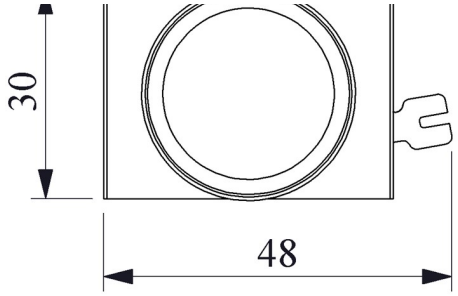

Devre Şeması

