




D070YXM

Operating Current	10-20 mA (12-24V AC/DC)
Operational Frequency	50 Hz
Operational Voltage	12-30V AC/DC
Product	Pilot
Color	Blue
Illumination	with LED
Dia	16 mm
Head Type	Round
Power Consumption	0.6 W
Insulation Voltage	Ui 300V
Operating Temperature	-15 / + 70 °C
Pollution Degree	3
Protection Degree	IP50
Cable Section	Terminal 2,8x0,5
Production Time	31.12.1899 00:00:00
Serial	D Series Plastic
Electrical Life	Min Hour 10000
Specifications	Non-flammable V0 PA6.6 contact blocks
	Various illumination contact blocks availability
	Variety of products for all areas of application
	Ease of use in limited spaces
Standards / Certificates	TS EN 60947-5-1


8,5

45,5

11

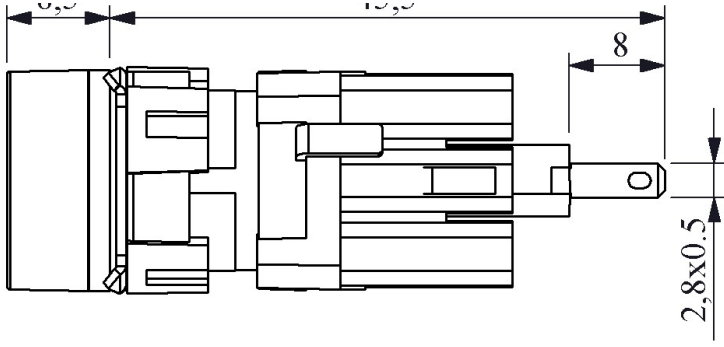

Montaj Ölçüsü $\varnothing 16.3 \pm 0.2$ mm

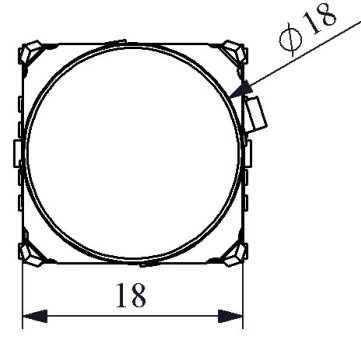

Devre Şeması

