





D080DXS

Operating Current	10-20 mA (12-24V AC/DC)	
Operational Frequency	50 Hz	
Operational Voltage	12-30V AC/DC	
Product	Pilot	
Color	Yellow	
Illumination	with LED	
Dia	16 mm	
Head Type	Rectangular	
Power Consumption	0.6 W	
Insulation Voltage	Ui	300V
Operating Temperature	-15 / + 70 °C	
Pollution Degree	3	
Protection Degree	IP50	
Cable Section	Terminal 2,8x0,5	
Production Time	31.12.1899 00:00:00	
Serial	D Series Plastic	
Electrical Life	Min Hour	10000
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availability	
	Variety of products for all areas of application	
	Ease of use in limited spaces	
Standards / Certificates	TS EN 60947-5-1	

8.5 45.5

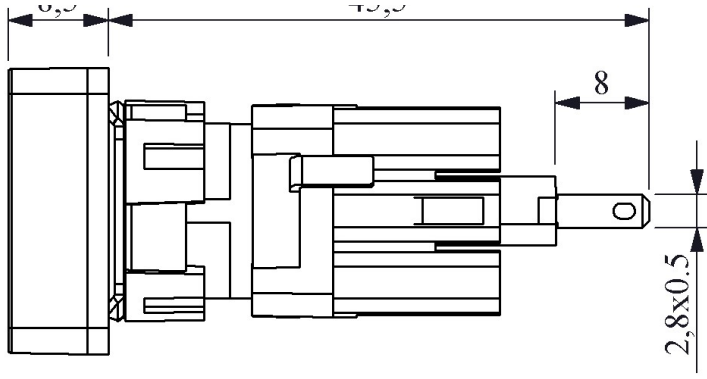

Montaj Ölçüsü $\varnothing 16.3 \pm 0.2$ mm

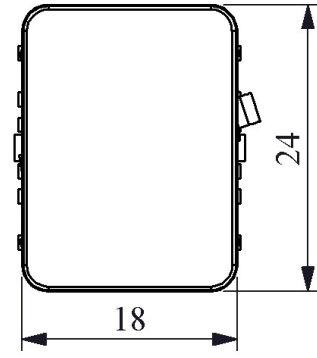

Devre Şeması

