


| | | |
|---|---|---|
| **EB048CF00** | | |
| **Print** | | 25-48 |
| **Operating Current** | | 16A |
| **Product** | | Multipole |
| **Type** | | Insert Plug |
| **Contact** | | 48 Poles |
| **Usage Category** | | AC15 |
| **Mechanical Life** | **Min Qty** | ≥ 500 |
| **Electrical Life** | **Min Qty** | ≥ 100 |
| **Operating Frequency** | **On-Off/Hour** | Mech.240 Elec.120 |
| **Insulation Voltage** | **Ui** | 690V |
| **Impulse Withstand Voltage** | **Uimp** | 6 kV |
| **Dielectric Strength (Body-Contact)** | | 1890V AC |
| **Dielectric Strength (Contact-Contact)** | | 3000V AC |
| **Isolation Resistance** | | 10 MΩ MİN. (500 V DC) |
| **Operating Temperature** | | -40 / +125 °C |
| **Pollution Degree** | | 2 |
| **Production Time** | | 31.12.1899 00:00:00 |
| **Serial** | | EB Series |
| **Specifications** | Wide product variety | |
| | IP65 in closed position | |
| | Universal inserts | |
| | Easy cabling | |
| | Different locking types | |
| | Powdercoated metal housing | |
| **Standards / Certificates** | TS EN 61984 | |

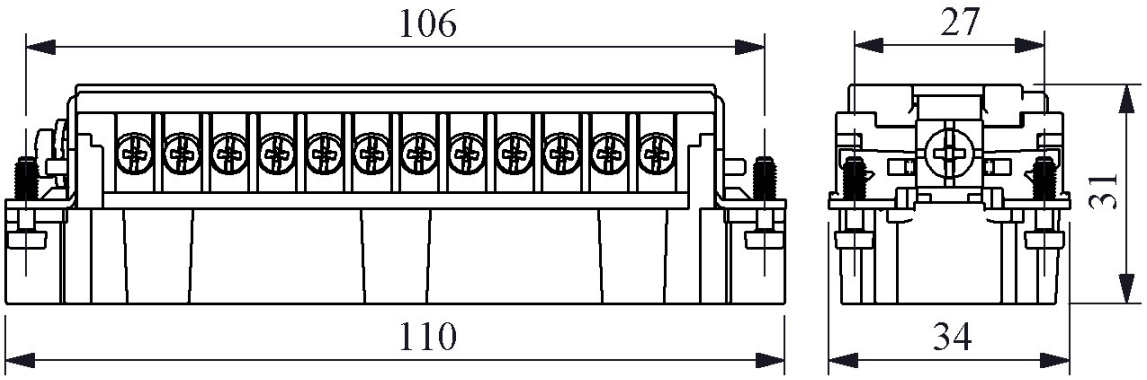


Kontak Sayısı: 2x(24P+E)