




EB0606CP00

Print	1-6
Operating Current	35A
Product	Multipole
Type	Insert Socket
Contact	6 Poles
Usage Category	AC15
Mechanical Life	Min Qty ≥ 500
Electrical Life	Min Qty ≥ 100
Operating Frequency	On-Off/Hour Mech.240 Elec.120
Insulation Voltage	Ui 690V
Impulse Withstand Voltage	Uimp 6 kV
Dielectric Strength (Body-Contact)	1890V AC
Dielectric Strength (Contact-Contact)	3000V AC
Isolation Resistance	10 MΩ Min. (500 V DC)
Operating Temperature	-40 / +125 °C
Pollution Degree	3
Production Time	31.12.1899 00:00:00
Serial	EB Series
Specifications	Wide product variety
	IP65 in closed position
	Universal inserts
	Easy cabling
	Different locking types
	Powdercoated metal housing

Standards / Certificates TS EN 61984



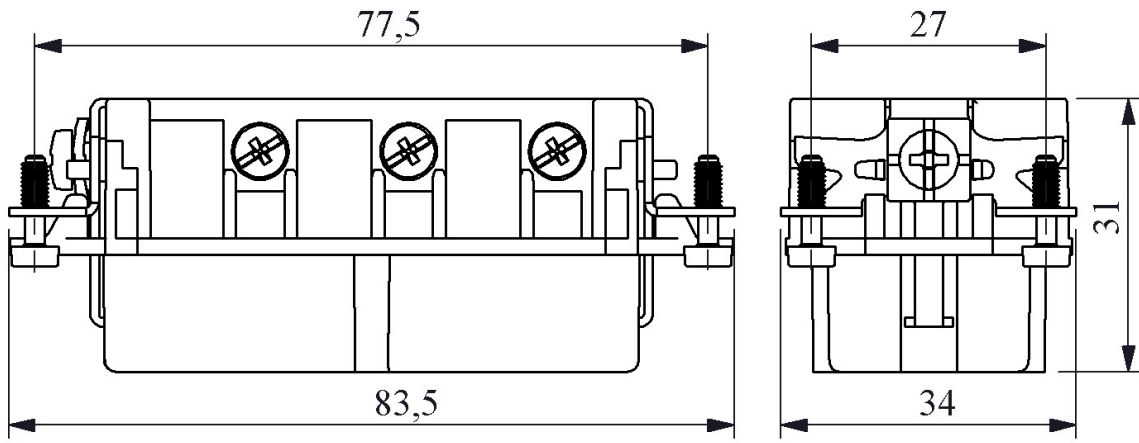

Kontak Sayısı: 6P+E