




## EBM24FD17

|                                       |                               |
|---------------------------------------|-------------------------------|
| Operating Current                     | 16A                           |
| Product                               | Multipole                     |
| Type                                  | Wall Type Plug                |
| Contact                               | 24 Poles                      |
| Usage Category                        | AC15                          |
| Mechanical Life                       | Min Qty ≥ 500                 |
| Electrical Life                       | Min Qty ≥ 100                 |
| Operating Frequency                   | On-Off/Hour Mech.240 Elec.120 |
| Insulation Voltage                    | Ui 690V                       |
| Impulse Withstand Voltage             | Uimp 6 kV                     |
| Dielectric Strength (Body-Contact)    | 1890V AC                      |
| Dielectric Strength (Contact-Contact) | 3000V AC                      |
| Isolation Resistance                  | 10 MΩ Min. (500 V DC)         |
| Operating Temperature                 | -40 / +125 °C                 |
| Pollution Degree                      | 2                             |
| Protection Degree                     | IP65                          |
| Body Material                         | Metal                         |
| Production Time                       | 31.12.1899 00:00:00           |
| Serial                                | EBM Series                    |
| Entry                                 | Side Entry                    |
| Locking                               | 2 Metal Handle                |
| Specifications                        | Wide product variety          |
|                                       | IP65 in closed position       |
|                                       | Universal inserts             |
|                                       | Easy cabling                  |
|                                       | Different locking types       |
|                                       | Powdercoated metal housing    |
| Standards / Certificates              | TS EN 61984                   |



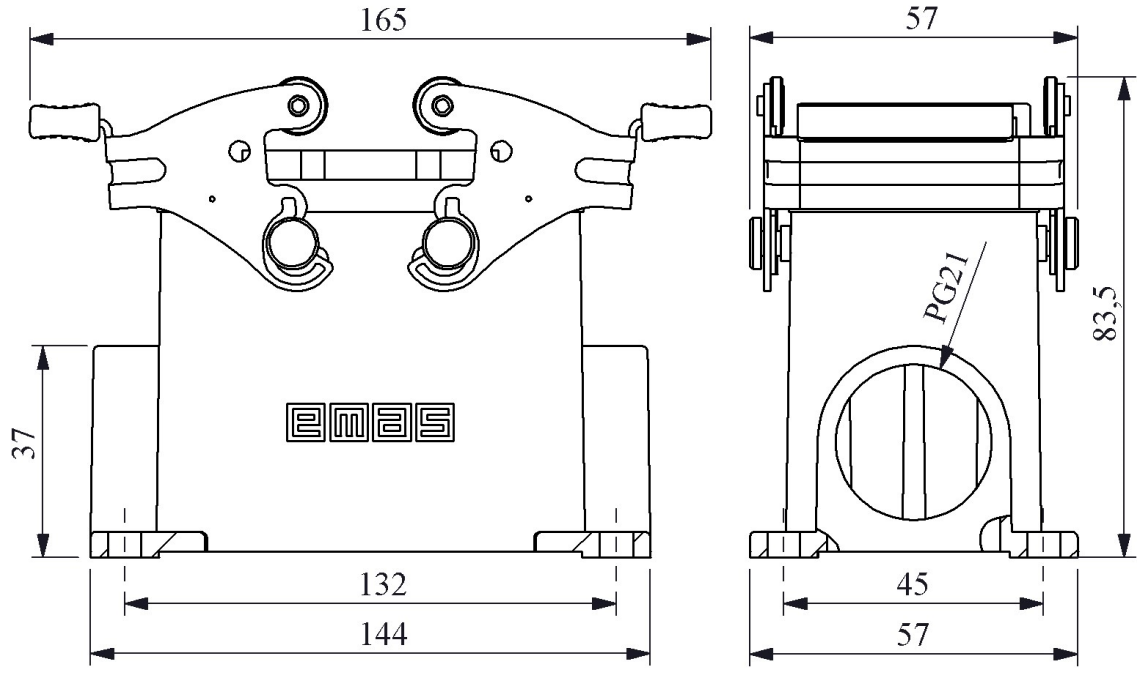

Kontak Sayısı: 24P+E