



H030XK

Product	Pilot
Color	Red
Illumination	with Ba9S Lampholder
Dia	30 mm
Insulation Voltage	Ui 300V
Operating Temperature	-15 / + 80 °C
Pollution Degree	3
Protection Degree	IP50
Cable Section	1.5-2.5 mm ²
Screw Torque	1,5 Nm
Production Time	31.12.1899 00:00:00
Serial	H Series Plastic
Specifications	Non-flammable V0 PA6.6 contact blocks
	Various illumination contact blocks availability
	Variety of products for all areas of application
Standards / Certificates	TS EN 60947-5-1



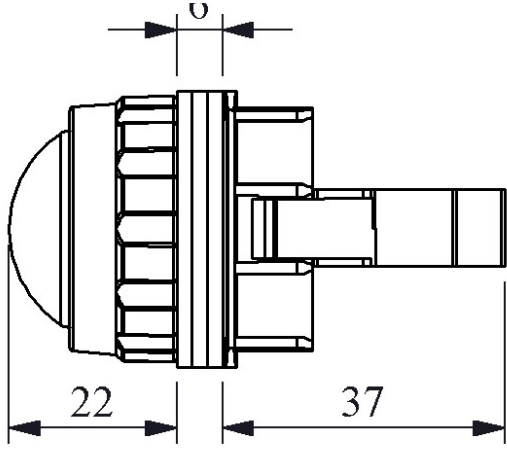

Montaj Ölçüsü $\varnothing 30.3 \pm 0.2$ mm

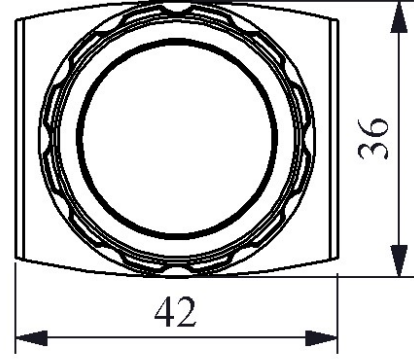

Devre Şeması

