



HJ21A25UO		
Operational Frequency		50 - 60Hz
Product		Contactor with Thermic in Box
Current	**Ie**	25A
Thermic Current Calibration Interval		10,00-15,00A
Usage Category		AC 3
Mechanical Life	**Min Qty**	100000
Electrical Life	**Min Qty**	100000
Operating Frequency	**On-Off/Hour**	Mech. 600 Elec. 600
Insulation Voltage	**Ui**	690V AC
Impulse Withstand Voltage	**Uimp**	6 kV
Dielectric Strength (Body-Contact)		1890V AC
Dielectric Strength (Contact-Contact)		1890V AC
Isolation Resistance		10 MΩ (500 V DC)
Operating Temperature		-5 / +40 °C
Pollution Degree		3
Protection Degree		IP30
Cable Section		2,5 mm²
Screw Torque		1,8 Nm
Short Circuit Breaking Capacity	**Ics**	50 kA
Serial		HJ Series
Voltage		220-230V/50-60HZ
Enclosure		with Rocker+Reset Button+Pilot
Specifications	High switching capacity	
	From 9A to 55A with 3 different sizes	
	Temperature compensated	

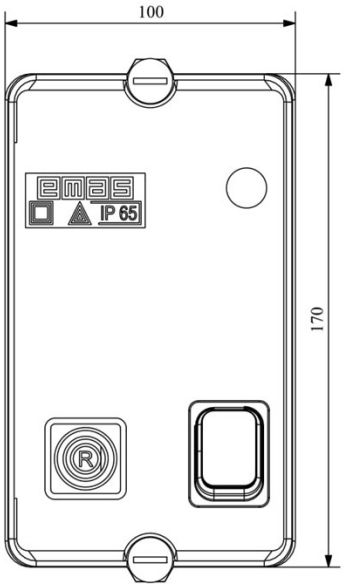

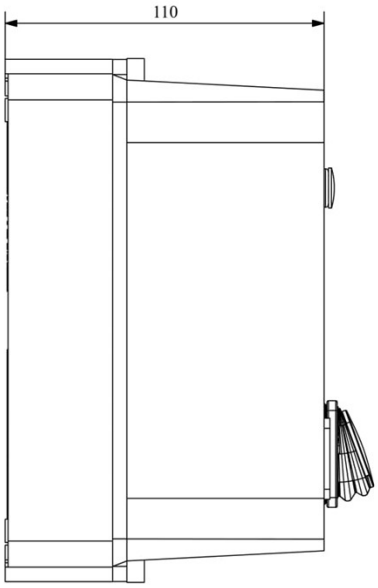


Montaj Ölçüsü

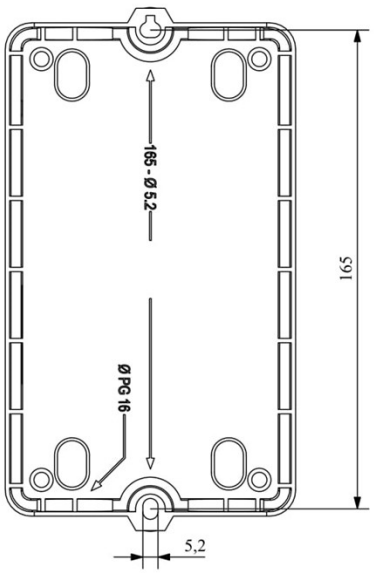

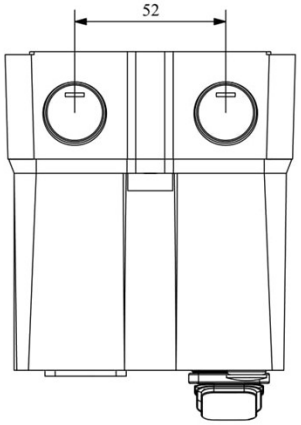


TRIFAZE ELEKTRIK ŞEMASI

220 V Bobinli Cihazlar
İçin Geçerlidir.

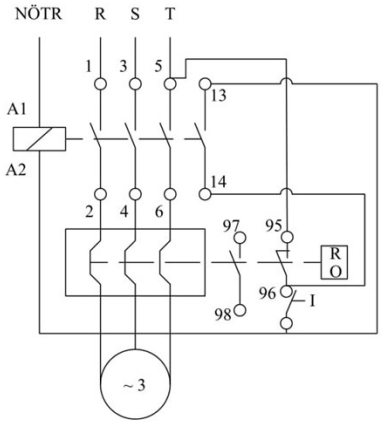

380 V Bobinli
Cihazlar için
Geçerlidir.

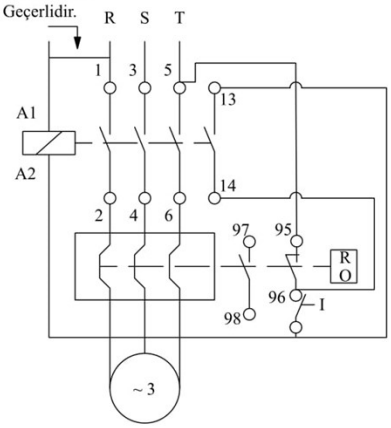

MONOFAZE ELEKTRIK ŞEMASI

