


HN1310NUE		
Operational Frequency		50 - 60Hz
Product		Contactor
Current	**Ie**	13A
Usage Category		AC 3
Mechanical Life	**Min Qty**	10000000
Electrical Life	**Min Qty**	1000000
Operating Frequency	**On-Off/Hour**	Mech. 1800 Elec. 600
Insulation Voltage	**Ui**	690V AC
Impulse Withstand Voltage	**Uimp**	6 kV
Dielectric Strength (Body-Contact)		1890V AC
Dielectric Strength (Contact-Contact)		1890V AC
Isolation Resistance		10 MΩ (500 V DC)
Operating Temperature		-15 / +80 °C
Pollution Degree		3
Protection Degree		IP20
Cable Section		1,5 mm²
Screw Torque		1,8 Nm
Short Circuit Breaking Capacity	**Ics**	50 kA
Serial		HN Series
Voltage		220-230V/50-60HZ
Auxilliary		1NO
Specifications	High switching capacity	
	From 9A to 55A with 3 different sizes	
	Temperature compensated	
Standards / Certificates	TS EN 60947-4-1	

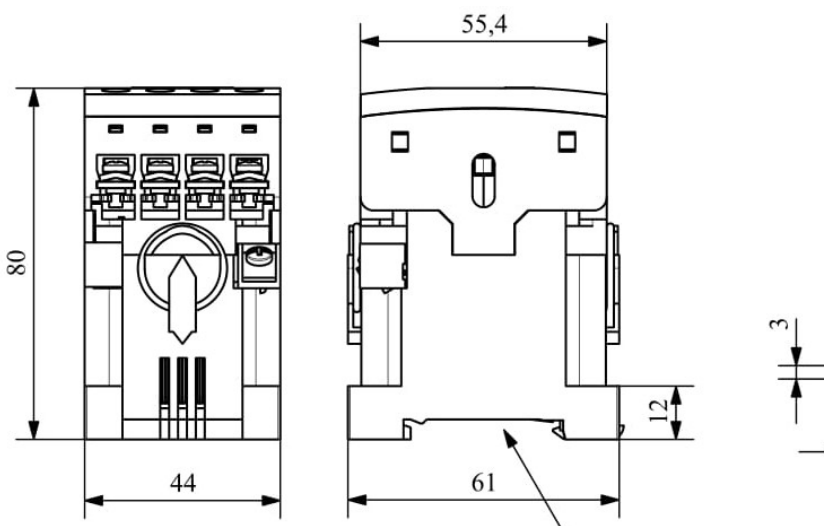

Montaj Ölçüsü

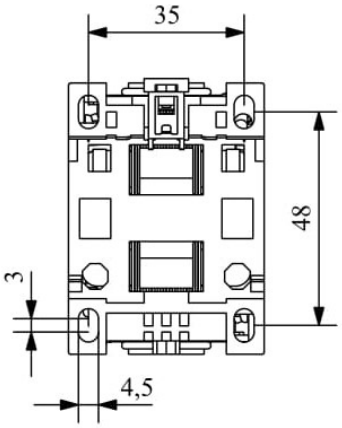

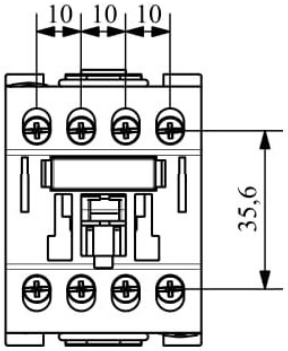

Elektrik Şeması

