


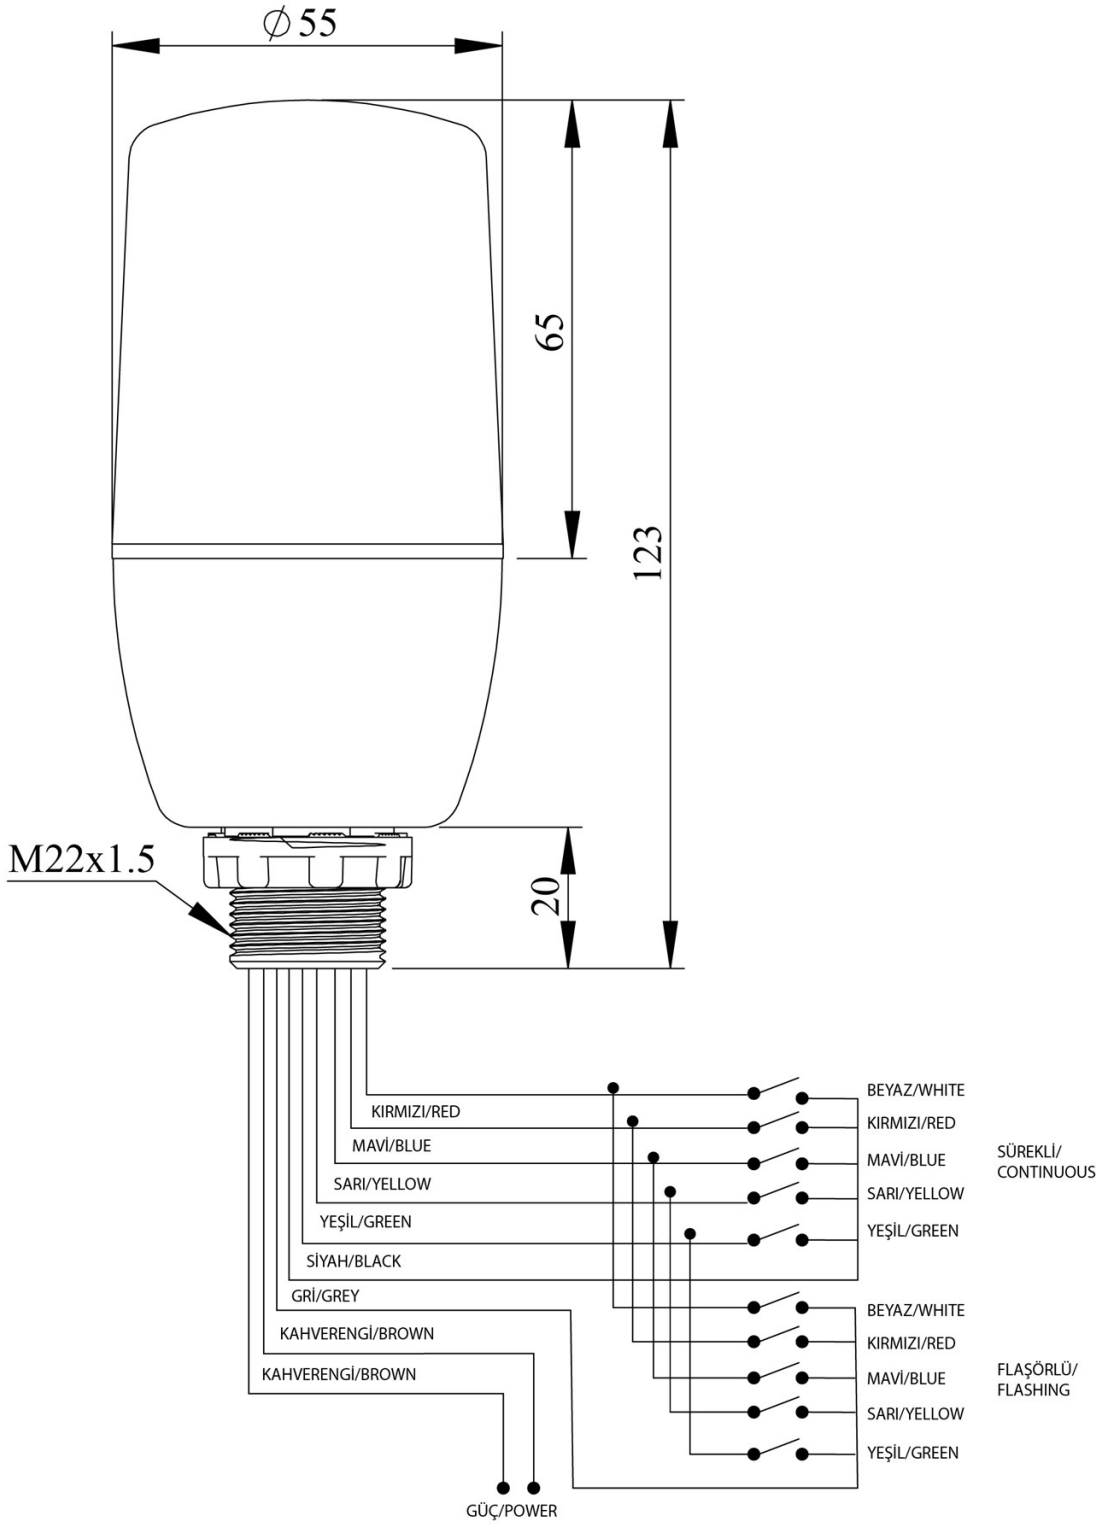

IF5M110XM05		
Weight (Gross with Carton)	**Gr**	115
Operational Frequency		50 Hz
Operational Voltage		110V AC
Product		LED Beacon 55mm
Control		Key Control
Mounting		M22 Screw
Color		Multicolor
Illumination		Constant
Power Consumption		11VA
Operating Frequency	**On-Off/Hour**	1 Hz
Insulation Voltage	**Ui**	300V
Operating Temperature		-25 °C /+70 °C
Protection Degree		IP65
Cable Section		Cable 0,50 mm2
Production Time		31.12.1899 00:00:00
Serial		IF Series
Electrical Life	**Min Hour**	10000
Specifications	Heat resistant, clear vision Polycarbonate signal module	
	Monoblock construction	
	Easy wiring	
	Easy to install to 22mm hole	


∅55
65
123
20
M22x1.5
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
SİYAH/BLACK
GRİ/GREY
KAHVERENGİ/BROWN
KAHVERENGİ/BROWN
GÜÇ/POWER
BEYAZ/WHITE
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
SÜREKLİ/
CONTINUOUS
BEYAZ/WHITE
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
FLAŞÖRLÜ/
FLASHING