


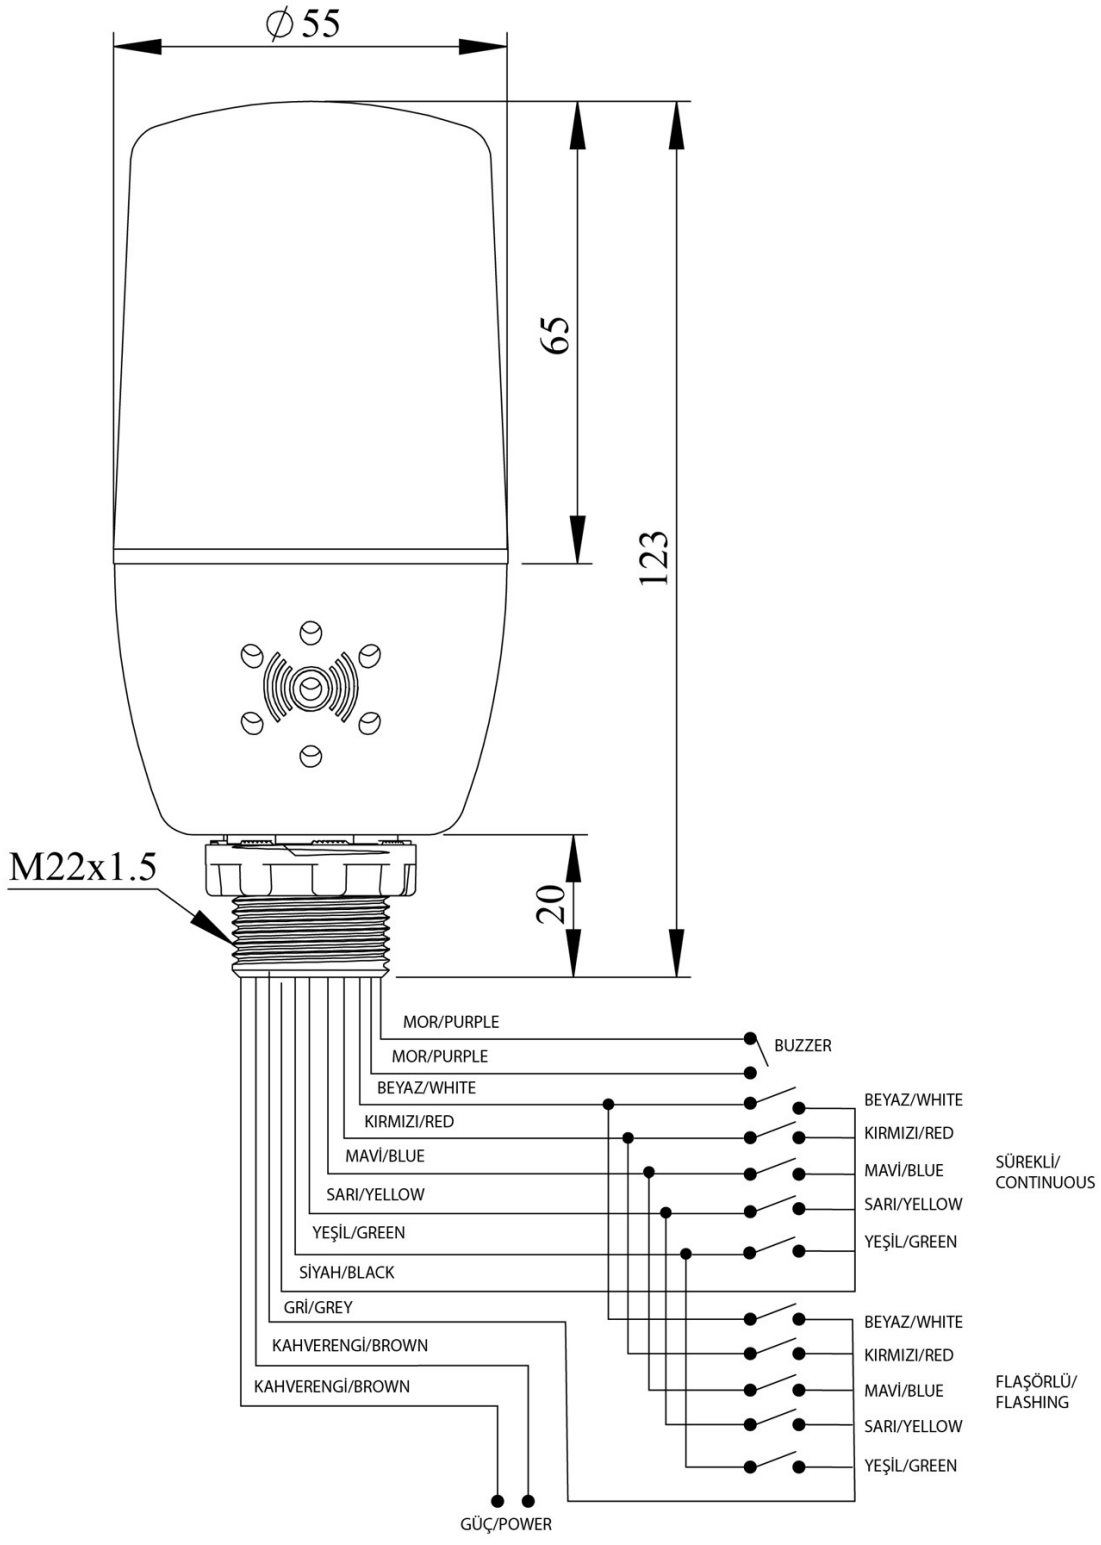

IF5M220ZM05		
Weight (Gross with Carton)	**Gr**	125
Operational Frequency		50 Hz
Operational Voltage		220V AC
Product		LED Beacon 55mm
Control		Key Control
Mounting		M22 Screw
Color		Multicolor
Illumination		Constant
Volume		90 dB
Power Consumption		10VA
Operating Frequency	**On-Off/Hour**	1 Hz
Insulation Voltage	**Ui**	300V
Operating Temperature		-25 °C /+70 °C
Protection Degree		IP65
Cable Section		Cable 0,50 mm2
Production Time		31.12.1899 00:00:00
Serial		IF Series
Buzzer		With Buzzer
Electrical Life	**Min Hour**	10000
Specifications	Heat resistant, clear vision Polycarbonate signal module	
	Monoblock construction	
	Easy wiring	
	Easy to install to 22mm hole	


∅55
65
123
20
M22x1.5
MOR/PURPLE
MOR/PURPLE
BEYAZ/WHITE
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
SİYAH/BLACK
GRİ/GREY
KAHVERENGİ/BROWN
KAHVERENGİ/BROWN
BUZZER
BEYAZ/WHITE
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
SÜREKLİ/
CONTINUOUS
BEYAZ/WHITE
KIRMIZI/RED
MAVİ/BLUE
SARI/YELLOW
YEŞİL/GREEN
FLAŞÖRLÜ/
FLASHING
GÜÇ/POWER