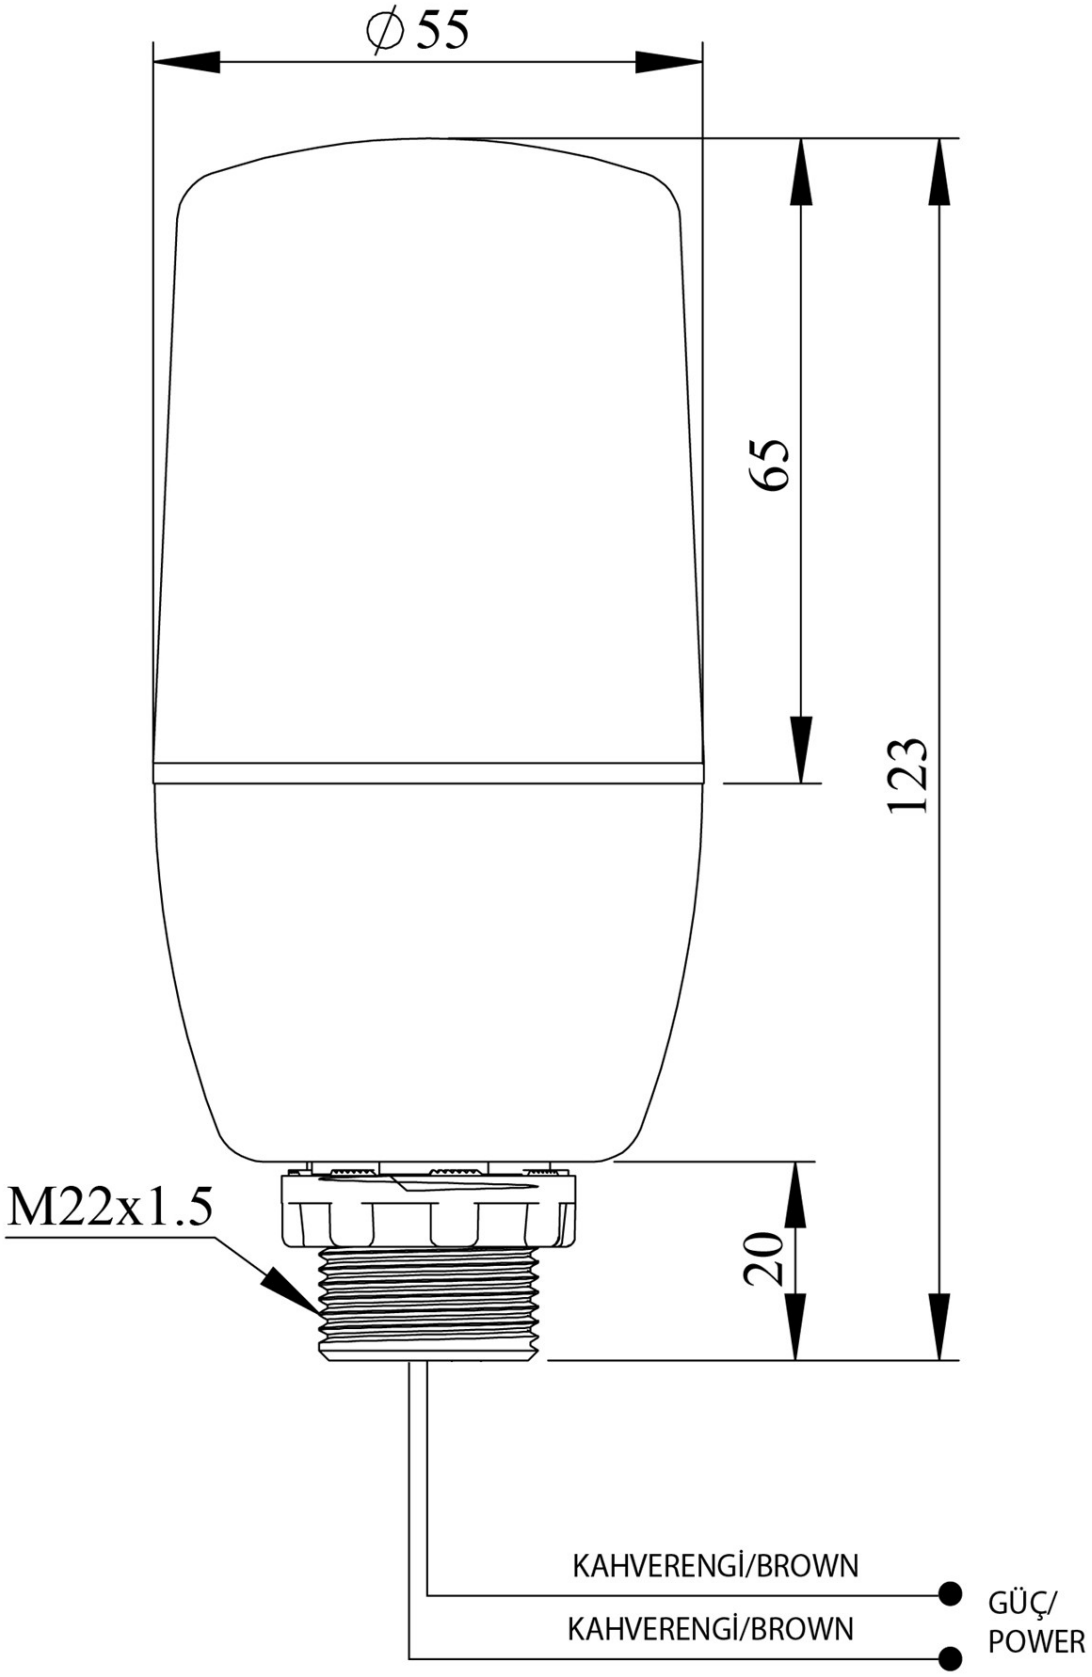
IF5Y024XRM05-2		
Operational Frequency		50 Hz
Operational Voltage		24V AC/DC
Product		LED Beacon 55mm
Control		Key Control
Mounting		M22 Screw
Color		Yellow
Illumination		Rotational
Cable		2mt Cable
Power Consumption		1.8W
Operating Frequency	**On-Off/Hour**	1 Hz
Insulation Voltage	**Ui**	300V
Operating Temperature		-25 °C /+70 °C
Protection Degree		IP65
Cable Section		Cable 0,50 mm2
Production Time		31.12.1899 00:00:00
Serial		IF Series
Electrical Life	**Min Hour**	10000
Specifications	Heat resistant, clear vision Polycarbonate signal module	
	Monoblock construction	
	Easy wiring	
	Easy to install to 22mm hole	


∅55
65
123
20
M22x1.5
KAHVERENGİ/BROWN
KAHVERENGİ/BROWN
GÜÇ/
POWER