


## IF6P024ZM05-2

Operational Frequency	50 Hz
Operational Voltage	24V DC
Product	LED Beacon 65mm
Control	PLC Harmonized
Mounting	M22 Screw
Color	Multicolor
Illumination	Constant
Cable	2mt Cable
Volume	90 - 105 dB
Power Consumption (Red)	1.1W
Power Consumption (Yellow)	1.4W
Power Consumption (Blue)	1.1W
Power Consumption (Green)	1.2W
Power Consumption (White)	2.7W
Power Consumption (Buzzer - Low Level)	0.75W
Power Consumption (Buzzer - High Level)	1.25W
Operating Frequency	On-Off/Hour 1 Hz
Insulation Voltage	Ui 300V
Operating Temperature	-25 °C /+70 °C
Protection Degree	IP65
Cable Section	Cable 0,50 mm <sup>2</sup>
Production Time	31.12.1899 00:00:00
Serial	IF Series
Buzzer	With Buzzer
Electrical Life	Min Hour 10000

**Specifications**

Heat resistant, clear vision Polycarbonate signal module
Monoblock construction
Easy wiring
Easy to install to 22mm hole



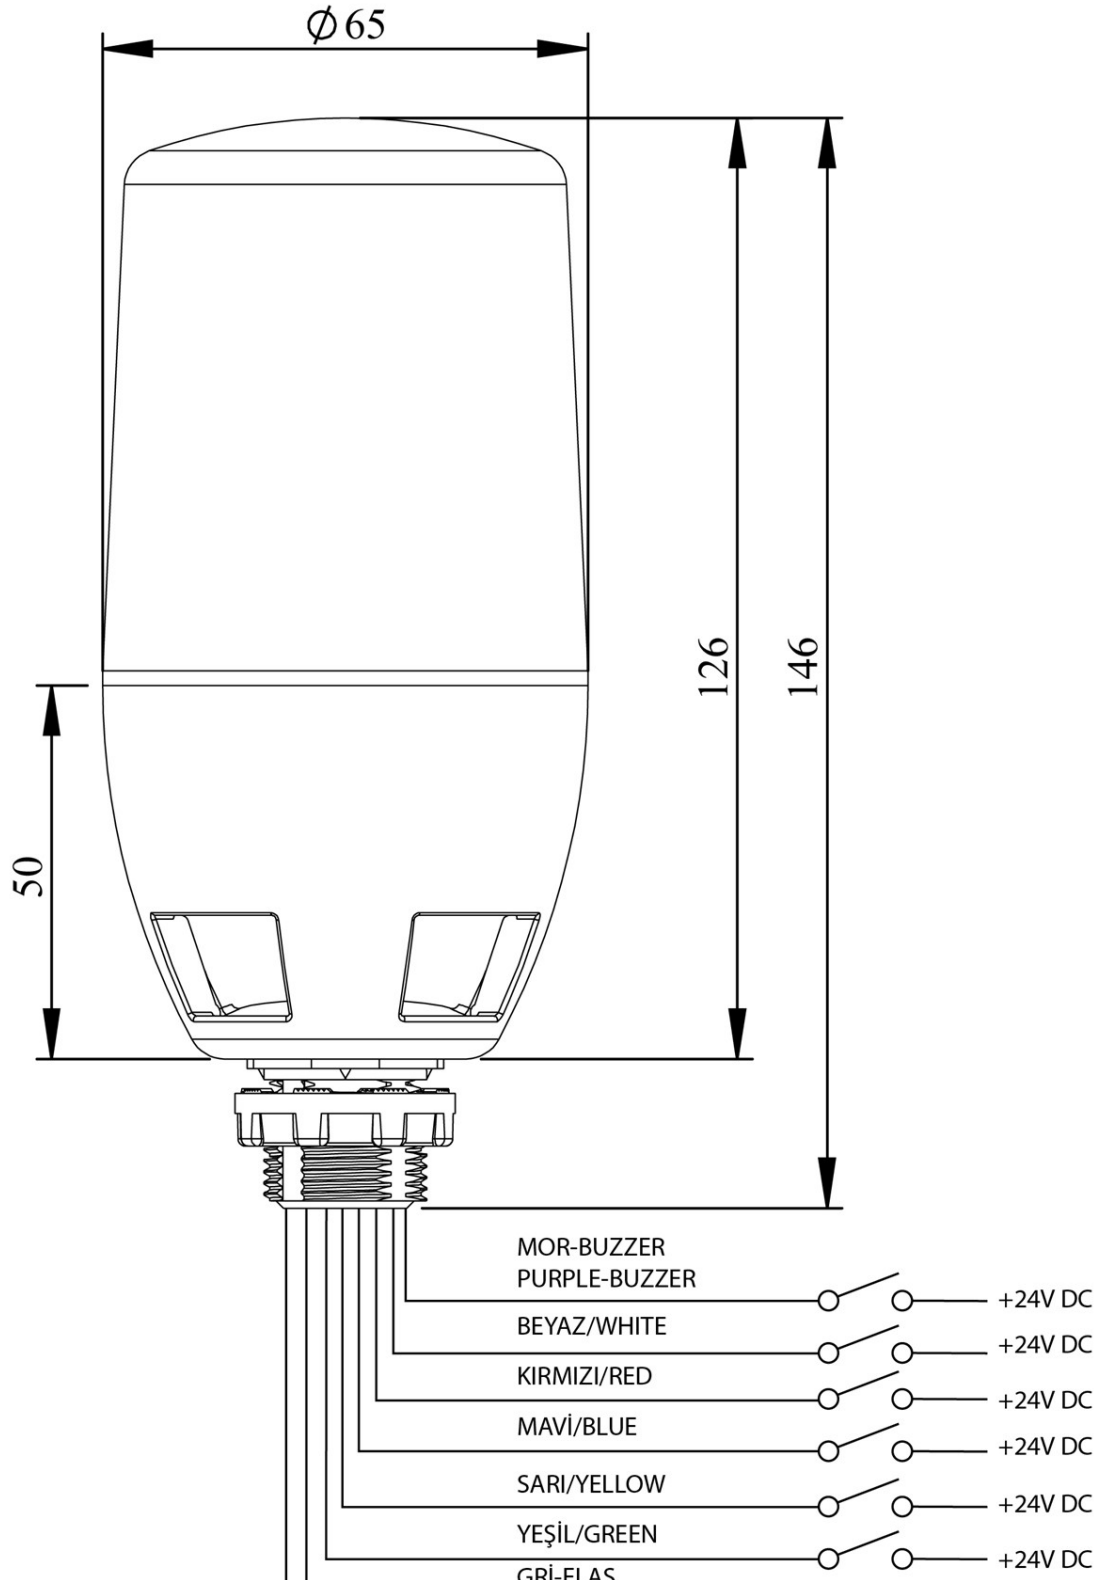

# Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limitation is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

[Upgrade to Commercial Edition of Spire.XLS](#)