



IK51L024XM03

Weight (Gross with Carton)

Gr

184

Bulb Type

LED

Operational Frequency

50 Hz

Operational Voltage

24V AC/DC

Product

LED Tower 50mm

Mounting

100mm Tube Plastic Base

Color

Single Level

Power Consumption

1W

Insulation Voltage

Ui

300V

Operating Temperature

-25 °C /+70 °C

Protection Degree

IP40

Cable Section

0,75-1,5 mm²

Screw Torque

1,8Nm

Lampholder Type

BA15S

Production Time

31.12.1899 00:00:00

Serial

IK Series

Electrical Life

Min Hour

10000

Specifications


Heat resistant, clear vision Polycarbonate signal modules

Modular construction

Easy wiring

Variety of connection bases

Kırmızı
Red

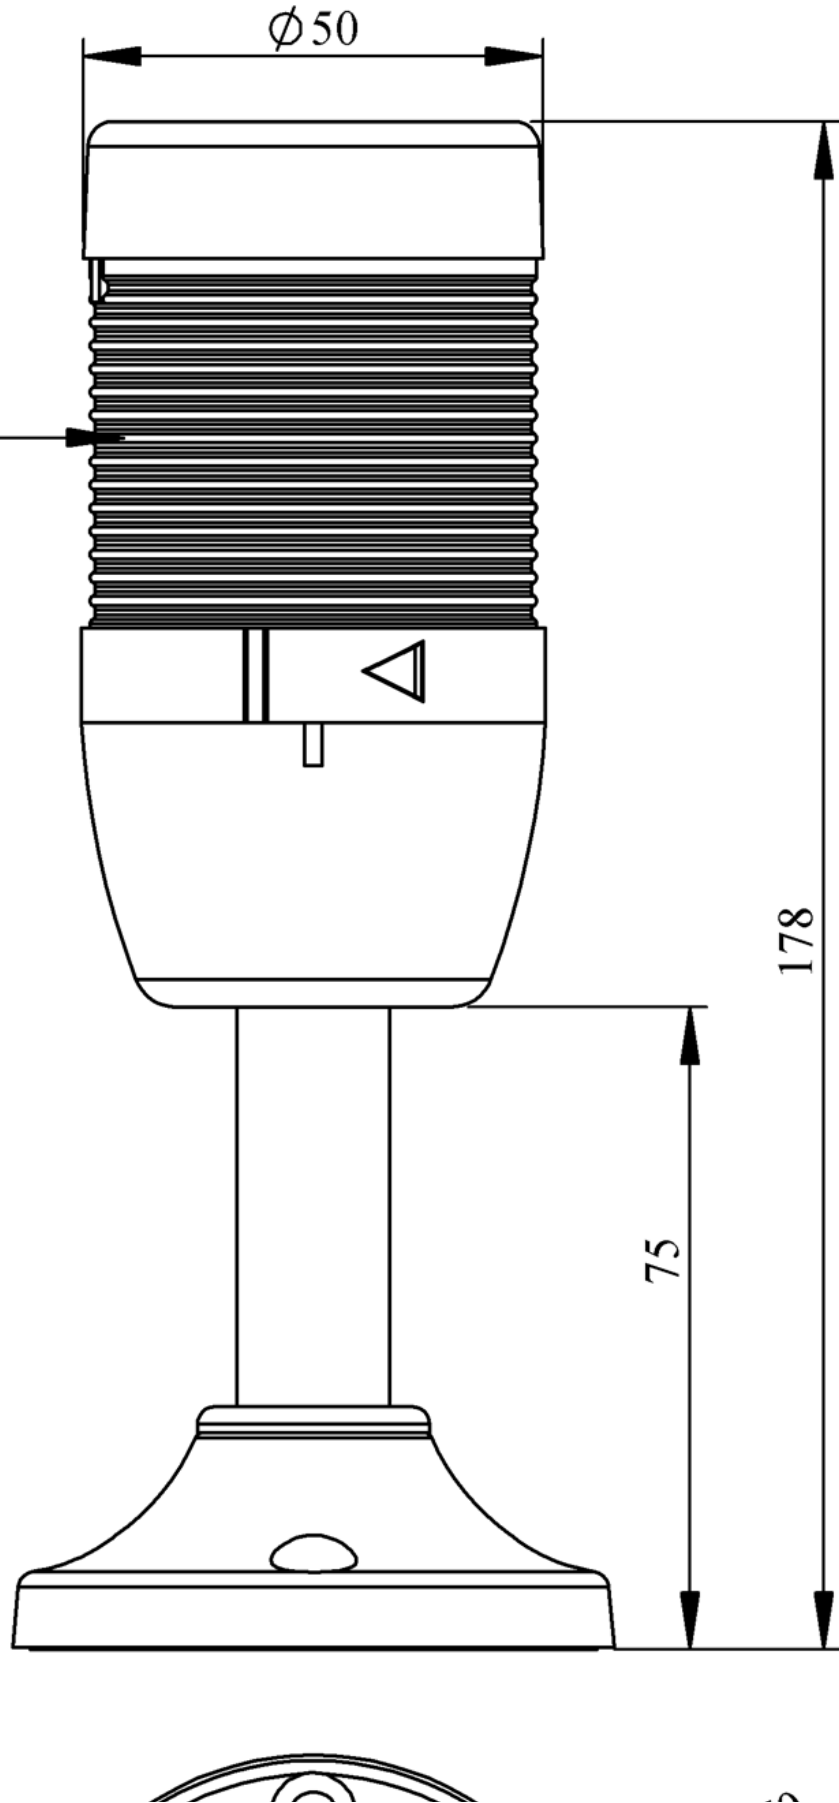

Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limitation is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

[Upgrade to Commercial Edition of Spire.XLS](#)