



IK52F024ZM03

Weight (Gross with Carton)

Bulb Type

Operational Frequency

Operational Voltage

Product

Mounting

Color

Illumination

Volume

Power Consumption

Operating Frequency

Insulation Voltage

Operating Temperature

Protection Degree

Cable Section

Screw Torque

Lampholder Type

Production Time

Serial

Buzzer

Electrical Life


Specifications

Gr	276			
	LED			
	50 Hz			
	24V AC/DC			
	LED Tower 50mm			
	100mm Tube Plastic Base			
	Three Level			
	Flasher			
	90 dB			
	3W			
On-Off/Hour	1 Hz			
Ui	300V			
	-25 °C /+70 °C			
	IP40			
	0,75-1,5 mm2			
	1,8Nm			
	BA15S			
	31.12.1899 00:00:00			
	IK Series			
	With Buzzer			
Min Hour	10000			
Heat resistant, clear vision Polycarbonate signal modules				
Modular construction				



Easy wiring

Variety of connection bases

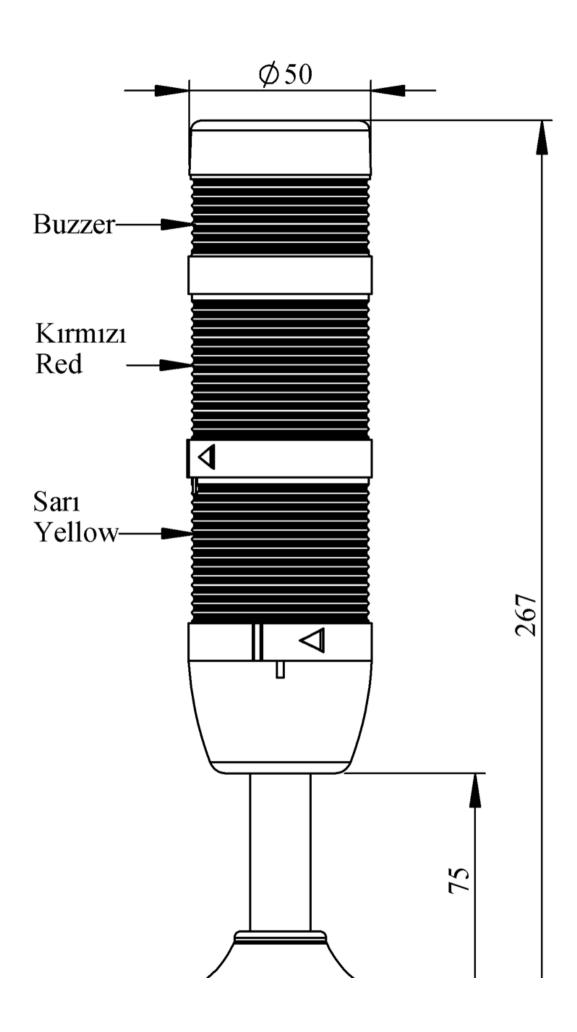

Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limition is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

Upgrade to Commercial Edition of Spire.XLS