




### IK53F024ZM03

Weight (Gross with Carton)	<b>Gr</b>	326
Bulb Type		LED
Operational Frequency		50 Hz
Operational Voltage		24V AC/DC
Product		LED Tower 50mm
Mounting		100mm Tube Plastic Base
Color		Four Level
Illumination		Flasher
Volume		90 dB
Power Consumption		4W
Operating Frequency	<b>On-Off/Hour</b>	1 Hz
Insulation Voltage	<b>Ui</b>	300V
Operating Temperature		-25 °C /+70 °C
Protection Degree		IP40
Cable Section		0,75-1,5 mm <sup>2</sup>
Screw Torque		1,8Nm
Lampholder Type		BA15S
Production Time		31.12.1899 00:00:00
Serial		IK Series
Buzzer		With Buzzer
Electrical Life	<b>Min Hour</b>	10000
Specifications	Heat resistant, clear vision Polycarbonate signal modules	
	Modular construction	
	Easy wiring	
	Variety of connection bases	



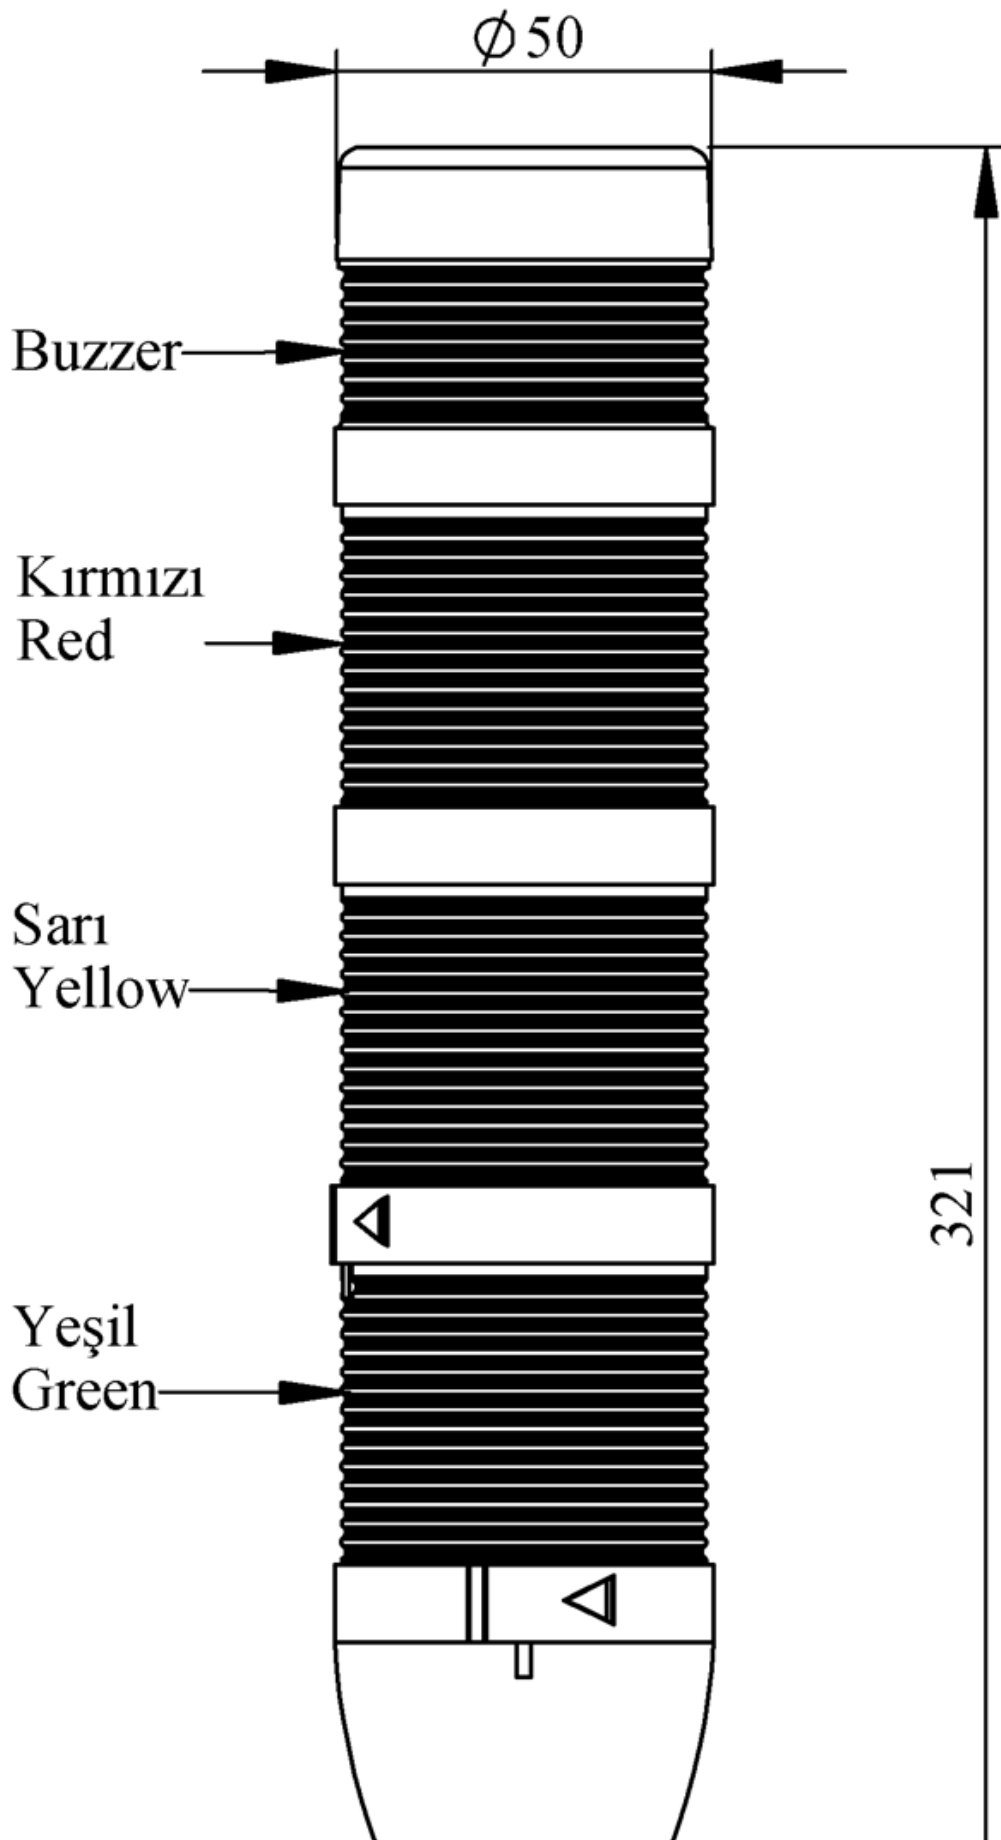

# Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limitation is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

[Upgrade to Commercial Edition of Spire.XLS](#)