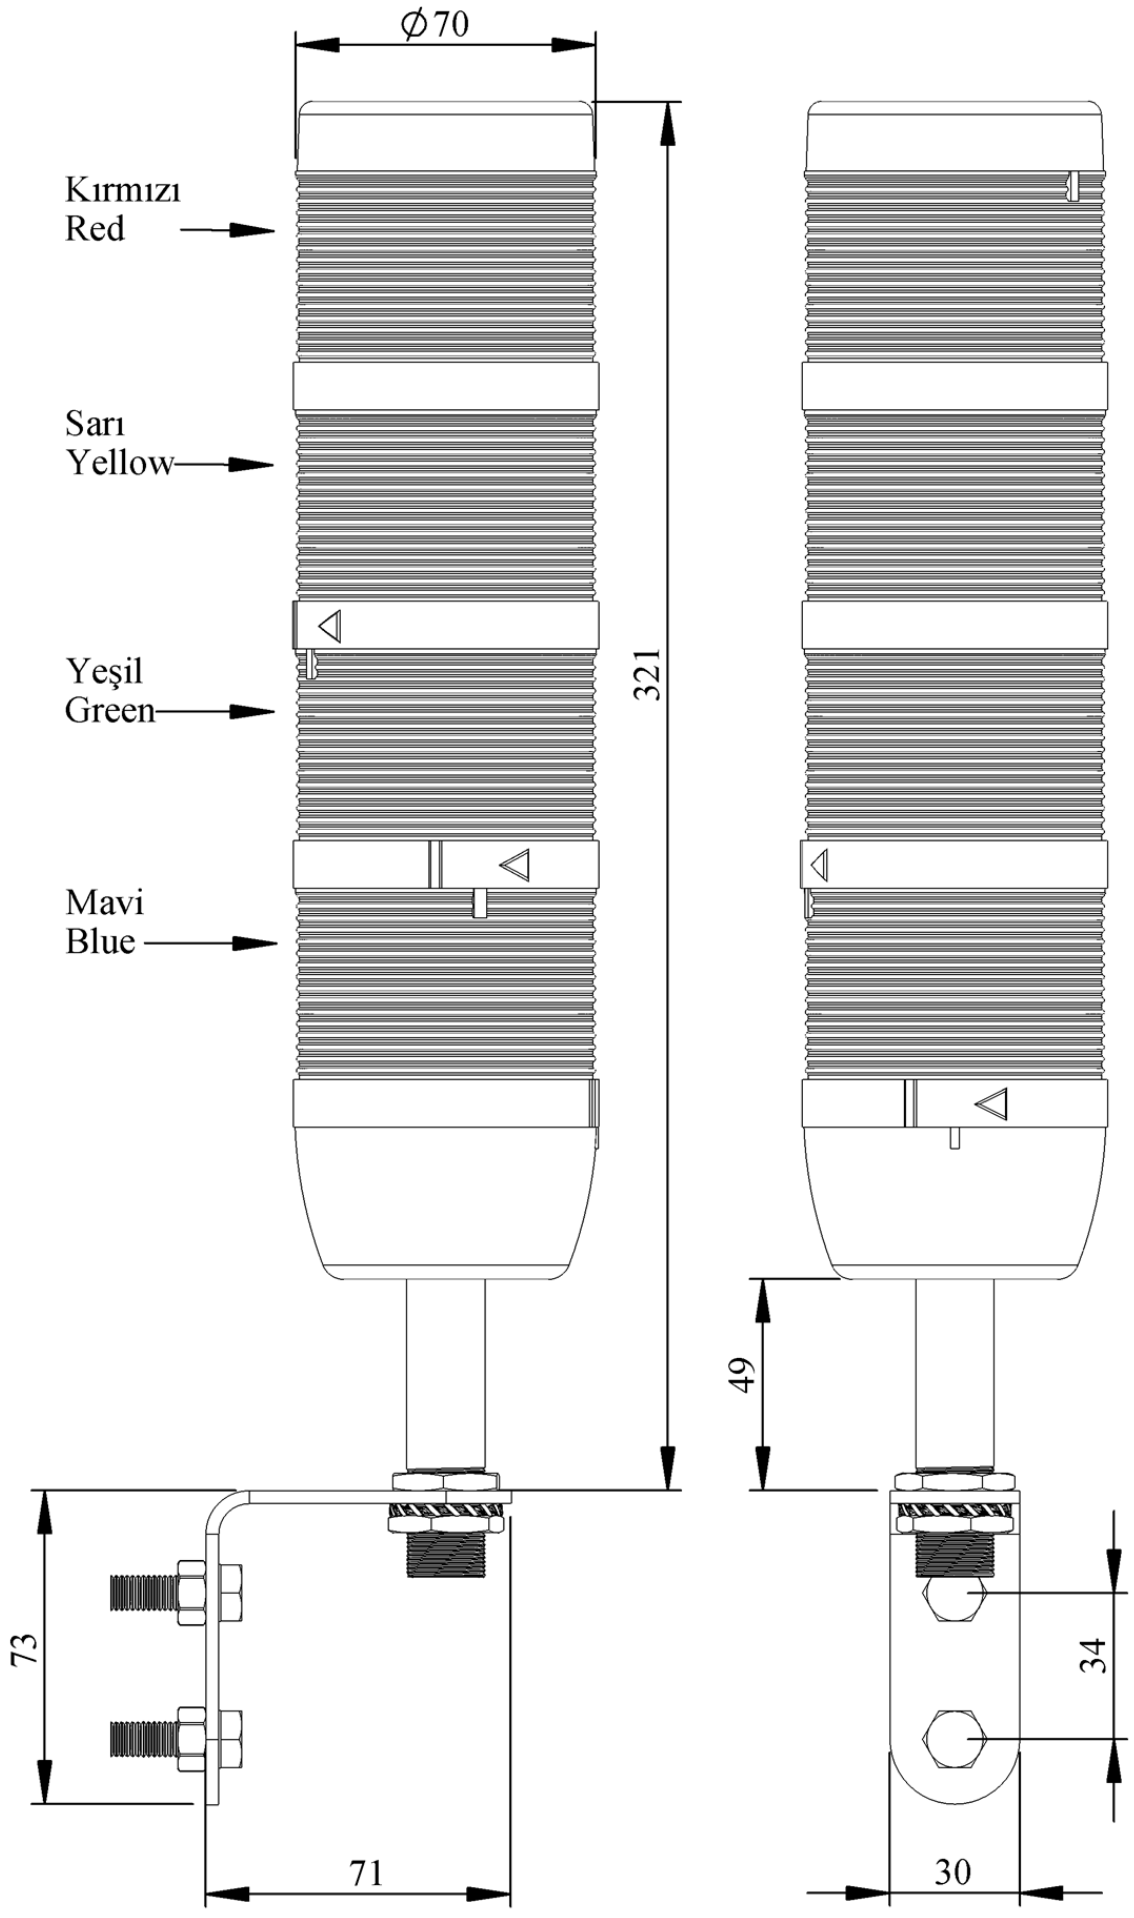
IK74F024XD01E		
Weight (Gross with Carton)	**Gr**	503
Bulb Type		LED
Operational Frequency		50 Hz
Operational Voltage		24V AC/DC
Product		LED Tower 70mm
Mounting		Wall (L) Base
Color		Four Level
Illumination		Flasher
Power Consumption		4W
Operating Frequency	**On-Off/Hour**	1 Hz
Insulation Voltage	**Ui**	300V
Operating Temperature		-25 °C /+70 °C
Protection Degree		IP65
Cable Section		0,75-1,5 mm2
Screw Torque		1,8Nm
Lampholder Type		BA15S
Production Time		31.12.1899 00:00:00
Serial		IK Series
Electrical Life	**Min Hour**	10000
Specifications	Heat resistant, clear vision Polycarbonate signal modules	
	Modular construction	
	Easy wiring	
	Variety of connection bases	


Ø70
Kırmızı
Red
Sarı
Yellow
Yeşil
Green
Mavi
Blue
321
49
73
71
34
30