





# L66K13MUM331-3

|                                       |                                    |
|---------------------------------------|------------------------------------|
| Product                               | Limit Switch                       |
| Serial                                | L66 Plastic Body                   |
| Actuator Dia                          | 11 mm                              |
| Actuator Material                     | Metal                              |
| Actuator                              | Roller Plunger                     |
| Contact Action                        | Snap Action                        |
| Contact                               | 1NO+1NC                            |
| Current (Ie)                          | 3 A (240V AC)                      |
| Usage Category                        | AC15                               |
| Mechanical Life (Min Qty)             | 10000000                           |
| Electrical Life (Min Qty)             | 1000000                            |
| Operating Frequency (On-Off/Hour)     | Mech. 3000 Elec. 1800              |
| Insulation Voltage (Ui)               | 300 V                              |
| Impulse Withstand Voltage (Uimp)      | 2.5 kV                             |
| Dielectric Strength (Body-Contact)    | 1.890V AC                          |
| Dielectric Strength (Contact-Contact) | 1.890V AC                          |
| Isolation Resistance                  | 10 MΩ (500 V DC)                   |
| Operating Temperature                 | -25 / + 80 °C                      |
| Pollution Degree                      | 3                                  |
| Protection Degree                     | IP67                               |
| Contact Material                      | AgNi                               |
|                                       | 1 kA                               |
| Specifications                        | Plastic Body                       |
|                                       | Different actuator options         |
|                                       | Easy connection with its own cable |
| Standards / Certificates              | TS EN 60947-5-1 UL 508 VDE 0660    |




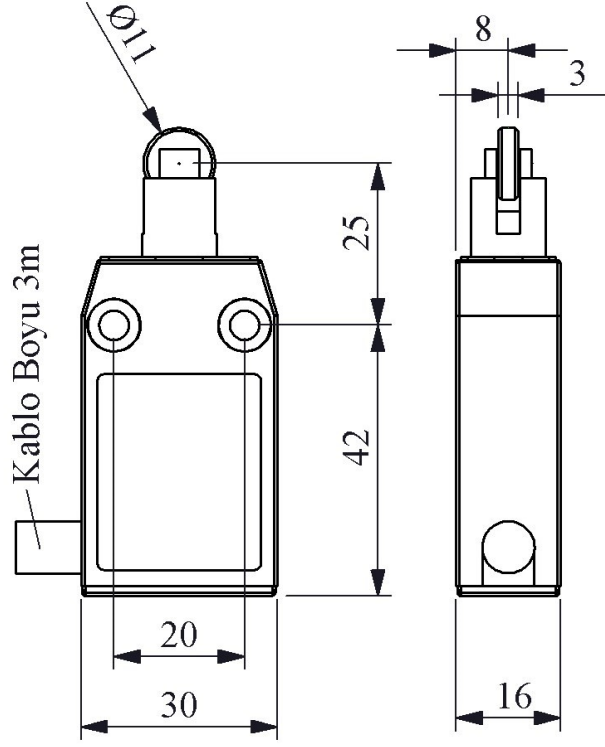

### Devre Şeması

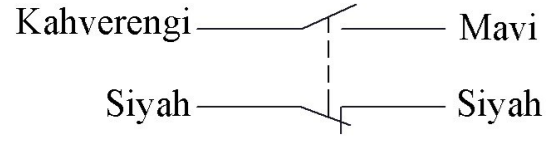

### Ani Hareketli



### Akış Diyagramı