






MA111TT

| | |
|---|-------------------------------------|
| Product | Toggle Switch |
| Serial | MA Series |
| Contact | 1NO |
| Connection Type | with Terminal |
| Feature | with Black Label |
| Print | (On-Off) Marked |
| Current | I_e 16 A (250V AC) |
| Usage Category | AC15 |
| Mechanical Life (Min Qty) | 100000 |
| Electrical Life (Min Qty) | 10000 |
| Operating Frequency (On-Off/Hour) | Mech.900 Elec.900 |
| Insulation Voltage (U _i) | 300V |
| Impulse Withstand Voltage (U _{imp}) | 2.5 kV |
| Dielectric Strength (Body-Contact) | 2.500V AC |
| Dielectric Strength (Contact-Contact) | 1.500V AC |
| Isolation Resistance | 10 MΩ min. (500V DC) |
| Operating Temperature | -25 / +80 °C |
| Pollution Degree | 3 |
| Protection Degree | IP20 |
| Contact Material | AgNi |
| Cable Section | Terminal 6,3*0,8 mm |
| | 1 kA |
| Specifications | V0 material |
| Standards / Certificates | TS EN 61058-1 |



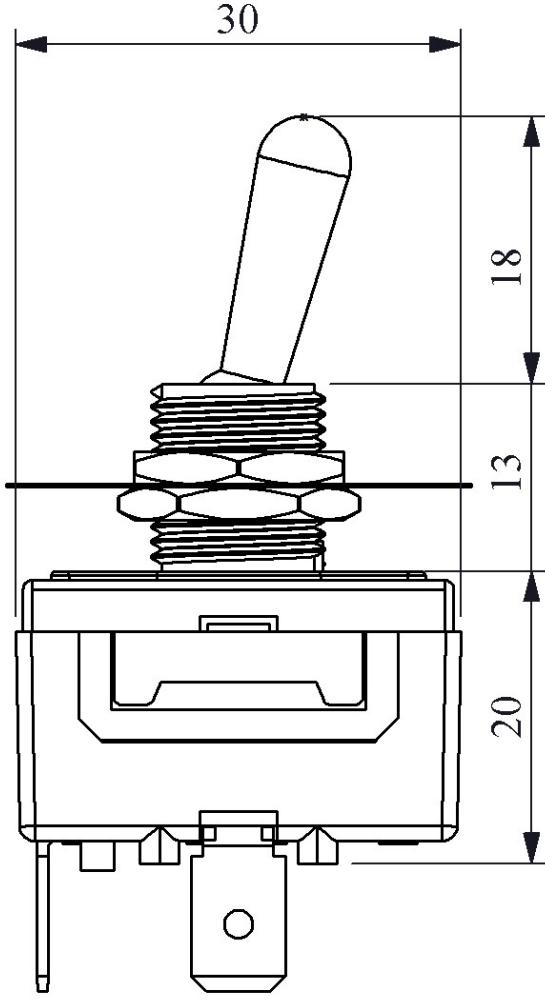

Devre Şeması

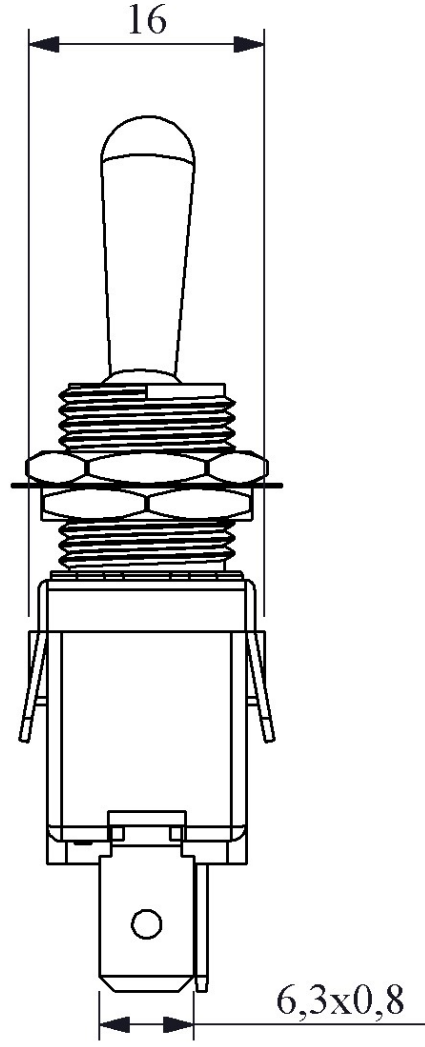

Montaj Ölçüsü ϕ 12 mm