





MA113		
Product		Toggle Switch
Serial		MA Series
Contact		1NO+1NO
Connection Type		with Screw
Print		(On-Off-On) Marked
Current	**Ie**	16 A (250V AC)
Usage Category		AC15
Mechanical Life (Min Qty)		100000
Electrical Life (Min Qty)		10000
Operating Frequency (On-Off/Hour)		Mech.900 Elec.900
Insulation Voltage (Ui)		300V
Impulse Withstand Voltage (Uimp)		2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-25 / +80 °C
Pollution Degree		3
Protection Degree		IP20
Contact Material		AgNi
Cable Section		1-2.5 mm²
Screw Torque		1,5 Nm
		1 kA
Specifications	V0 material	
Standards / Certificates	TS EN 61058-1	

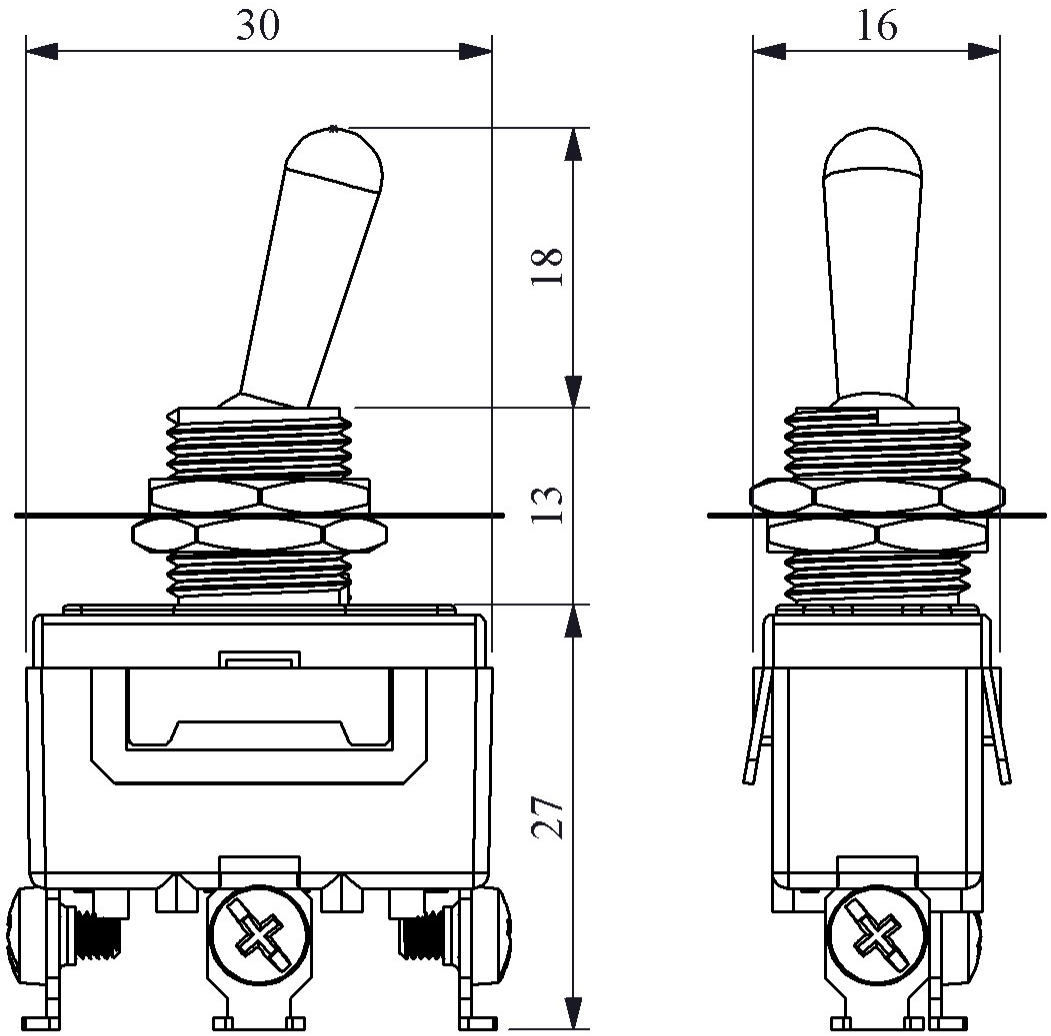

Devre Şeması



Montaj Ölçüsü ∅ 12 mm