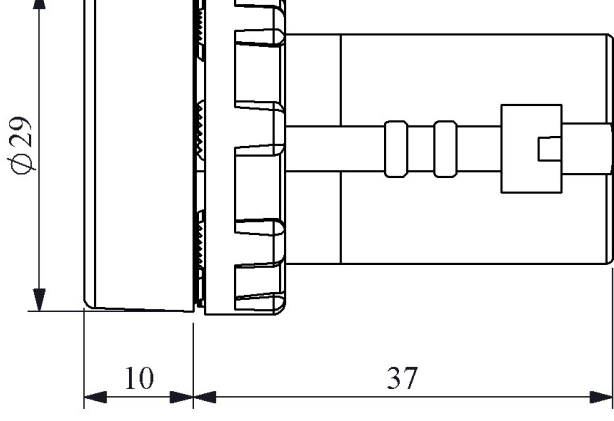




MBSD012K

Bulb Type		Led
Operating Current		18 mA
Operational Frequency		50 Hz
Operational Voltage		12V AC/DC
Product		Pilot
Color		Red
Illumination		with LED
Dia		22 mm
Power Consumption		0.3 W
Insulation Voltage	Ui	250 V
Operating Temperature		-15 / + 70 °C
Protection Degree		IP50
Cable Section		1.5-2.5 mm ²
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		MB Series Plastic
Electrical Life	Min Hour	10000
Specifications		Non-flammable V0 PA6.6 contact blocks
		Monoblock strong body
		Finger safe protection





Montaj Ölçüsü $\text{Ø}22.4 \pm 0.2 \text{ mm}$



Devre Şeması

