


MBZS110S		
Bulb Type		Led
Operating Current		25 mA
Operational Frequency		50 Hz
Operational Voltage		110V AC
Product		Buzzer
Illumination		with LED
Dia		22 mm
Volume		90 dB
Power Consumption		<3.5 VA
Insulation Voltage	**Ui**	250 V
Operating Temperature		-15 / + 70 °C
Protection Degree		IP50
Cable Section		1.5-2.5 mm²
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		MB Series Plastic
Electrical Life	**Min Hour**	10000
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Monoblock strong body	
	Finger safe protection	






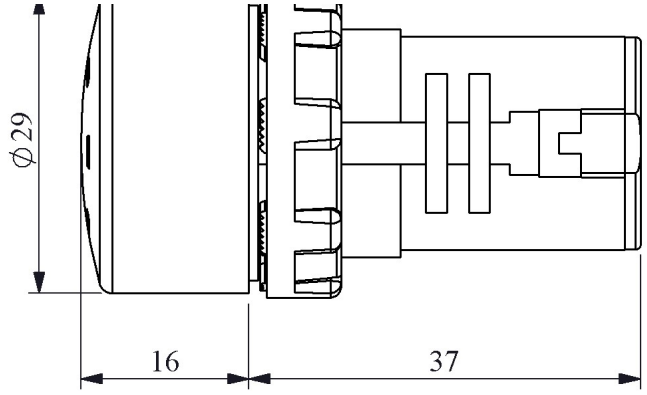

Montaj Ölçüsü Ø22.4 ±0.2 mm



Devre Şeması



Buzzer