


MKS1TM-0,40		
Product		Motor Protection Switch
Serial		MKS Series
Thermic Current Calibration Interval		0,25-0,40A
Operational Frequency		50-60 Hz
Current (Ie)		25 A
Usage Category		AC 3
Mechanical Life (Min Qty)		100000
Electrical Life (Min Qty)		100000
Operating Frequency (On-Off/Hour)		Mek. 360 Elk. 360
Insulation Voltage (Ui)		690V AC
Impulse Withstand Voltage (Uimp)		6 kV
Dielectric Strength (Contact-Contact)		1890V
Isolation Resistance		10 MΩ MİN. (500 V DC)
Operating Temperature		-5 / +40 °C
Pollution Degree		3
Protection Degree		IP40
Cable Section		0,75-4 mm²
Screw Torque		1,8 Nm
		6 kA
Specifications	13 different product options between 0.16 - 25 A	
	Fixedly set short circuit protection 12xle	
	Short circuit switching capacity minimum 6 kA / 400 V	
	Protection against phase deficiency	
	Compensated against ambient temperature	
	Can be mounted on DIN 35 mm mounting rail	
	Wide range of accessories	
Standards / Certificates	TS EN 60947-4-1	



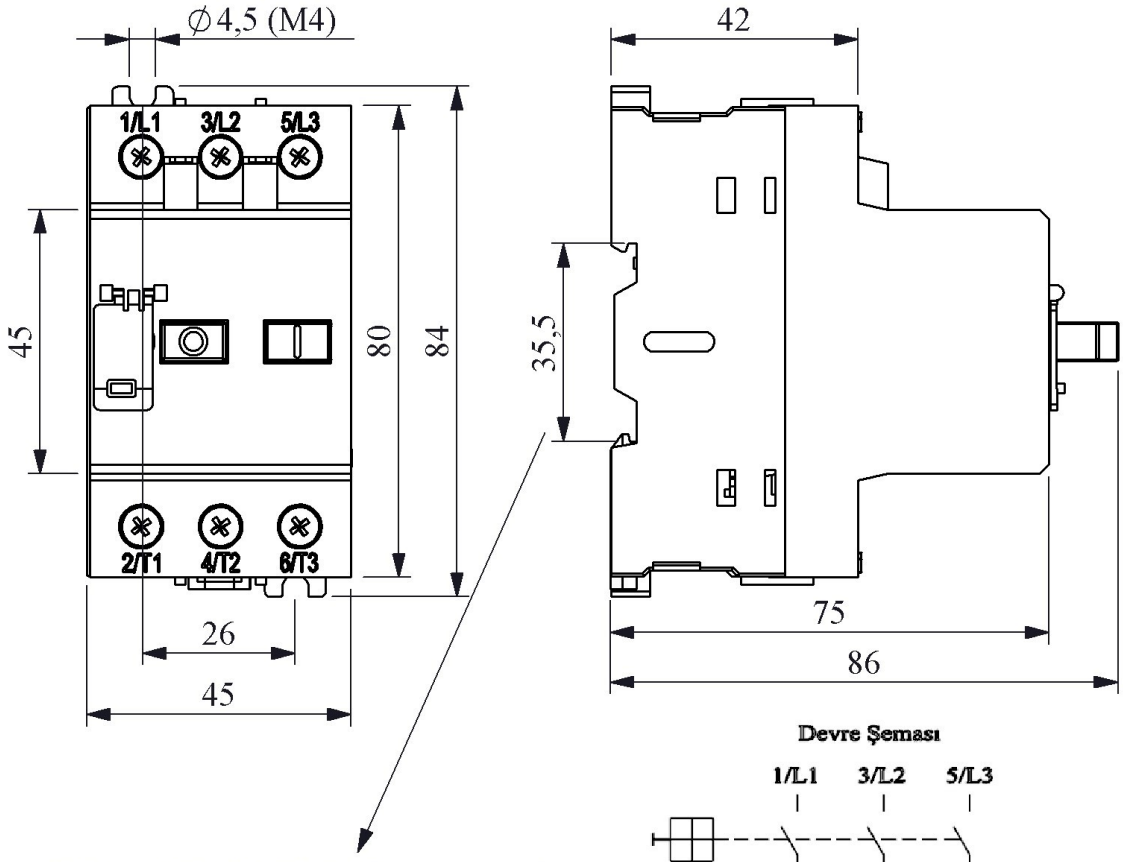

DIN rail EN 50022-35 Raya uygundur.

Devre Şeması

