



MKS1TM-1

Product Motor Protection Switch

Serial MKS Series

Thermic Current Calibration Interval 0,63-1,00A

Operational Frequency 50-60 Hz

Current (Ie) 25 A

Usage Category AC 3

Mechanical Life (Min Qty) 100000

Electrical Life (Min Qty) 100000

Operating Frequency (On-Off/Hour) Mek. 360 Elk. 360

Insulation Voltage (Ui) 690V AC

Impulse Withstand Voltage (Uimp) 6 kV

Dielectric Strength (Contact-Contact) 1890V

Isolation Resistance 10 MΩ Min. (500 V DC)

Operating Temperature -5 / +40 °C

Pollution Degree 3

Protection Degree IP40

Cable Section 0,75-4 mm²

Screw Torque 1,8 Nm

Short Circuit Capacity 6 kA

Specifications 13 different product options between 0.16 - 25 A

Fixedly set short circuit protection 12xle

Short circuit switching capacity minimum 6 kA / 400 V

Protection against phase deficiency


Compensated against ambient temperature

Can be mounted on DIN 35 mm mounting rail

Wide range of accessories

Standards / Certificates TS EN 60947-4-1



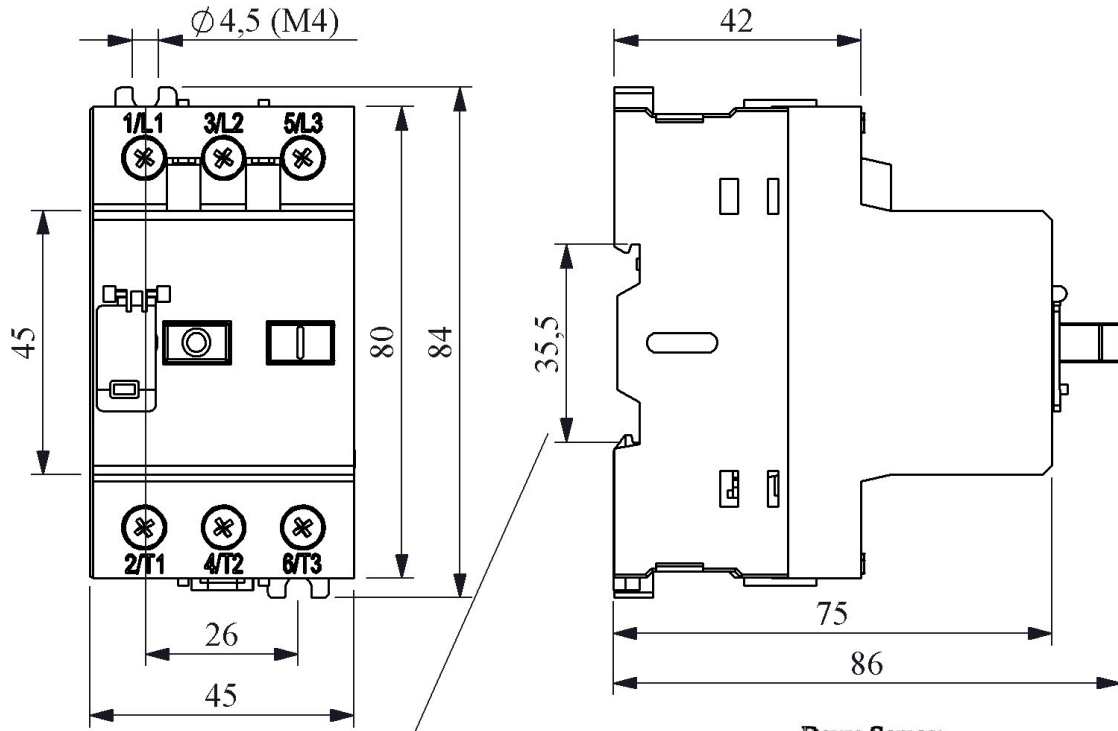

DIN rail EN 50022-35 Raya uygundur.

