





PDM1		
Carton Box pieces	**Qty**	1
Product		Foot Switch
Contact		1CO
Color		Black
Current	**Ie**	6 A (250V AC)
Usage Category		AC 15
Mechanical Life	**Min Qty**	1000000
Electrical Life	**Min Qty**	100000
Operating Frequency	**On-Off/Hour**	Mech. 1800 Elec. 1200
Insulation Voltage	**Ui**	660V
Impulse Withstand Voltage	**Uimp**	2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.890V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-25 / +80 °C
Pollution Degree		3
Protection Degree		IP20
Contact Material		AgNi
Cable Section		1.5-2.5 mm2
Screw Torque		1.5Nm
Short Circuit Breaking Capacity	**Ics**	1 kA
Body Material		Plastic
Production Time		31.12.1899 00:00:00
Serial		PDM Series
Specifications	Plastic	
	Single speed	
Standards / Certificates	TS EN 60947-5-1	



PDM1

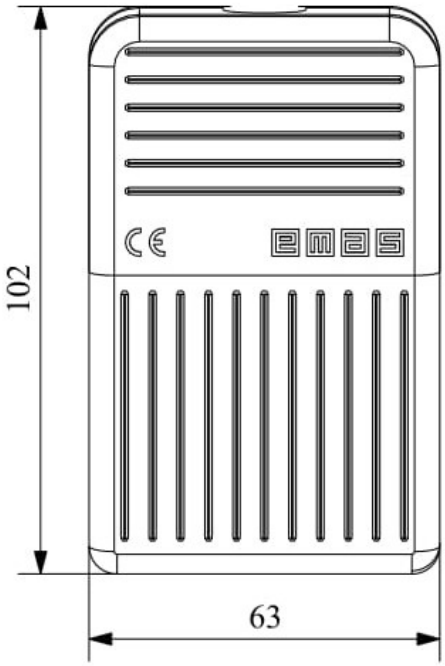

Devre Şeması

