


PSA020KD354S

Product	Cam Switch
Feature	Yayli Geri Dönüş
Label/Position	(1-0-2)
Switch Type	Changeover
Pole / Phase	3 Poles
Frame Size	48*48
Current	Ie 20A
Usage Category	AC21A
Mechanical Life	Min Qty 100000
Electrical Life	Min Qty 50000
Operating Frequency	On-Off/Hour Mech.120 Elec.120
Insulation Voltage	Ui 690V
Impulse Withstand Voltage	Uimp 4 kV
Dielectric Strength (Body-Contact)	1.890V AC
Dielectric Strength (Contact-Contact)	1.890V AC
Isolation Resistance	10 MΩ MIN. (500 V DC)
Operating Temperature	-25 / +80 °C
Pollution Degree	3
Protection Degree	IP54
Contact Material	AgNi
Cable Section	1-2,5 mm ²
Spin Angle	30°-90°
Short Circuit Breaking Capacity	Ics 6 kA
Serial	PSA Series
Specifications	High precision
	Variety of products for wide application fields
	Long life time
	Compact design

Standards / Certificates	TS EN 60947-3
--------------------------	---------------



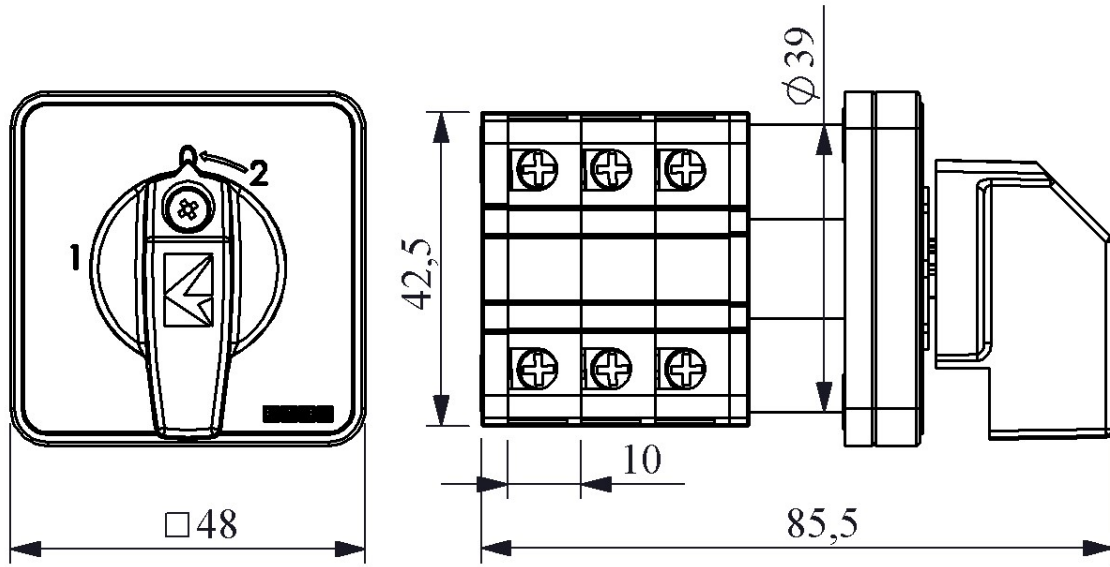

Devre Şeması

	1	3	5	7	9	11
	2	4	6	8	10	12
1	X		X		X	
0						
2		X		X		X

