


PSA025AK341E		
Product		Cam Switch
Feature		Safety
Label/Position		(0-1)
Switch Type		On-Off
Pole / Phase		3 Phase
Frame Size		48*48
Current	**Ie**	25A
Usage Category		AC21A
Mechanical Life	**Min Qty**	100000
Electrical Life	**Min Qty**	50000
Operating Frequency	**On-Off/Hour**	Mech.120 Elec.120
Insulation Voltage	**Ui**	690V
Impulse Withstand Voltage	**Uimp**	4 kV
Dielectric Strength (Body-Contact)		1.890V AC
Dielectric Strength (Contact-Contact)		1.890V AC
Isolation Resistance		10 MΩ MIN. (500 V DC)
Operating Temperature		-25 / +80 °C
Pollution Degree		3
Protection Degree		IP54
Contact Material		AgNi
Cable Section		1-2,5 mm2
Spin Angle		90°
Short Circuit Breaking Capacity	**Ics**	6 kA
Serial		PSA Series
Specifications	High precision	
	Variety of products for wide application fields	
	Long life time	
	Compact design	

Standards / Certificates	TS EN 60947-3

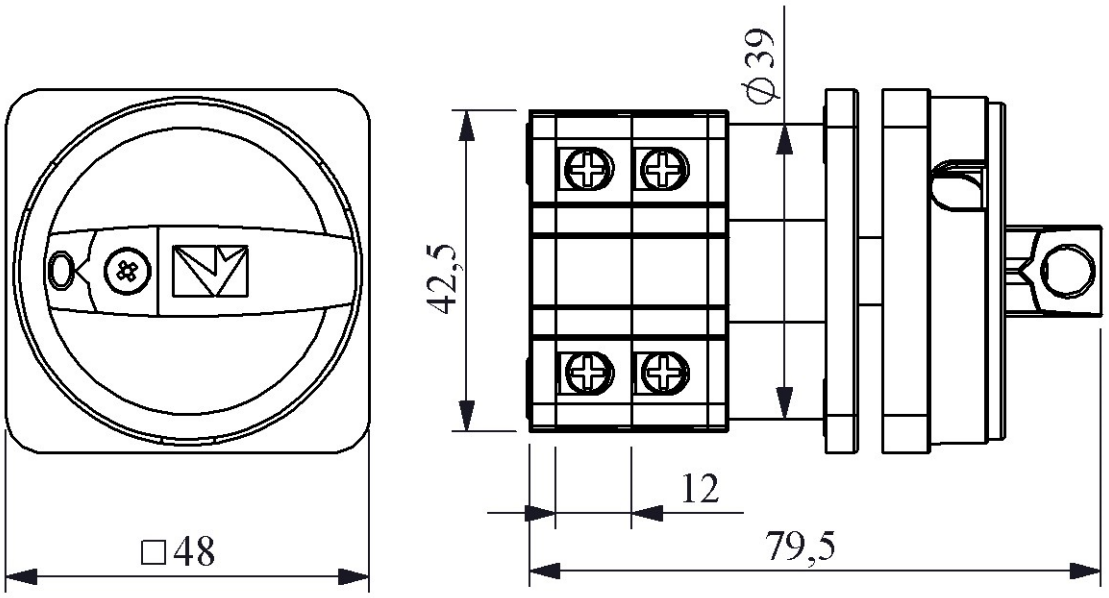

Devre Şeması

	1 2	3 4	5 6
0			
1	X	X	X

