



## PV9T12222

|                                       |                                                                               |                     |
|---------------------------------------|-------------------------------------------------------------------------------|---------------------|
| Product                               | Crane Pendant Station                                                         |                     |
| Type                                  | 9 Hole                                                                        |                     |
| Current                               | Ie                                                                            | 4A (250V AC)        |
| Usage Category                        | AC15                                                                          |                     |
| Mechanical Life                       | Min Qty                                                                       | 1000000             |
| Electrical Life                       | Min Qty                                                                       | 100000              |
| Operating Frequency                   | On-Off/Hour                                                                   | Mech. 900 Elec. 900 |
| Insulation Voltage                    | Ui                                                                            | 300 V               |
| Impulse Withstand Voltage             | Uimp                                                                          | 2.5 kV              |
| Dielectric Strength (Body-Contact)    | 2.500V AC                                                                     |                     |
| Dielectric Strength (Contact-Contact) | 1.500V AC                                                                     |                     |
| Isolation Resistance                  | 10 MΩ (500 V DC)                                                              |                     |
| Operating Temperature                 | -15 / + 80 °C                                                                 |                     |
| Pollution Degree                      | 3                                                                             |                     |
| Protection Degree                     | IP65                                                                          |                     |
| Contact Material                      | AgNi                                                                          |                     |
| Cable Section                         | 1.5-2.5 mm <sup>2</sup>                                                       |                     |
| Screw Torque                          | 1.5Nm                                                                         |                     |
| Short Circuit Breaking Capacity       | Ics                                                                           | 1kA                 |
| Serial                                | PV Series                                                                     |                     |
| Speed                                 | Single Speed                                                                  |                     |
| 1.Hole                                | Blind Cap                                                                     |                     |
| Specifications                        | Aesthetic look and ergonomic usage with assistance of ABS reinforced material |                     |
|                                       | Mechanical interlock                                                          |                     |
|                                       | Single and double speed                                                       |                     |
| Standards / Certificates              | TS EN 60947-5-1 UL 508 VDE 0660                                               |                     |



PV9T12222

TEK HIZ BEYAZ  
Devre Şeması

3 — 4

1 — 2

TEK HIZ SİYAH  
Devre Şeması

3 — 4

1 — 2

TEK HIZ BEYAZ  
Devre Şeması


3 — 4

1 — 2

TEK HIZ SİYAH  
Devre Şeması

3 — 4

1 — 2

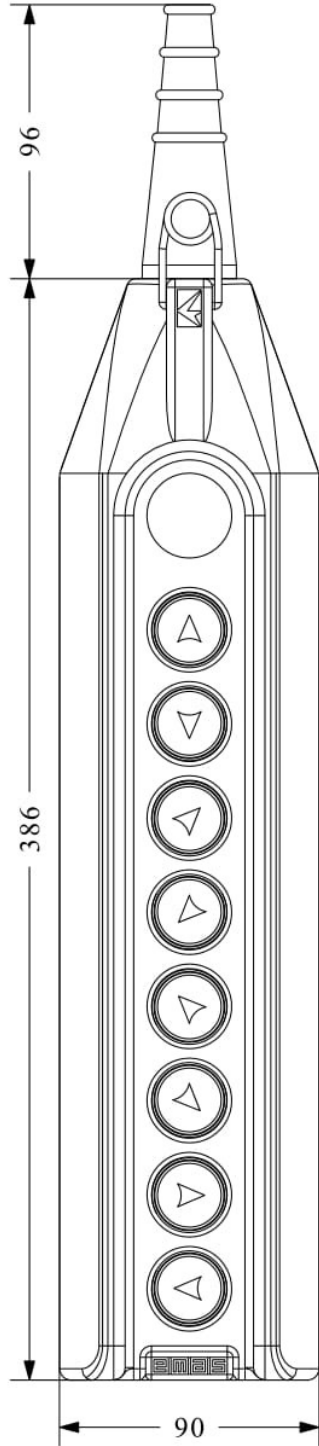

TEK HIZ BEYAZ  
Devre Şeması

3 — 4

1 — 2

TEK HIZ SİYAH  
Devre Şeması

3 — 4

1 — 2

TEK HIZ BEYAZ  
Devre Şeması

3 — 4

1 — 2

TEK HIZ SİYAH  
Devre Şeması

3 — 4

1 — 2

