





### RDA1A

Current Transformer Setting	...	5 A
Switching Capacity		6000/saat
Connection Type		8 Pins
Operational Frequency		50Hz
Operational Voltage		230VAC
Product		Panelmeter
Control		Digital
Type		Ampermeter
Contact		1CO
Current	<b>I<sub>e</sub></b>	5A (rezistif)
Mechanical Life	<b>Min Qty</b>	10000000
Electrical Life	<b>Min Qty</b>	100000
Operating Temperature		-5°C...+55°C
Protection Degree		IP20
Contact Material		AgNi
Output Type		1 pcs relay 10A/250V AC
Measure Interval		0...5 A
Maximum Contact Power		1500 VA
Number of Contact		1 changeover
Voltage Interval		(0,85-1.1)*U <sub>e</sub>
Indicator		7 Segment Display
Number of Digits		3
Serial		RD Series
Specifications		Compact design
		Fast and silent switching
		Long life
		Fingerproof design

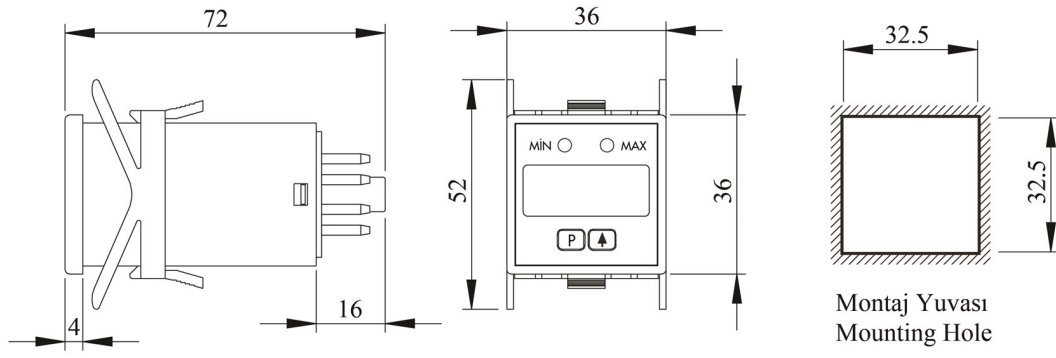

- 2-7 : Besleme (220 V AC) / Supply (220 V AC)  
3-4-5: Çıkış kontakları / Relay output  
1-8 : Ölçme girişi / Measuring input

Not : Dijital panelmetreler RS1P08 tipi röle soketiyle kullanıma uygundur.  
Note : Digital panelmeters can be used with RS1P08 type sockets.