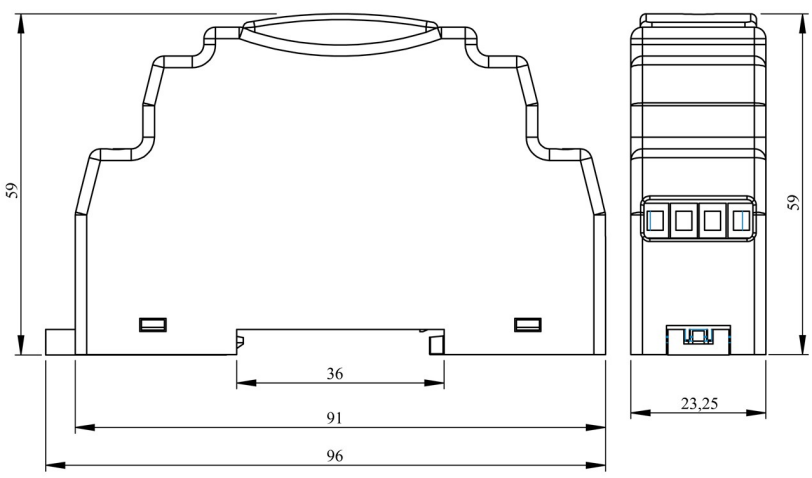
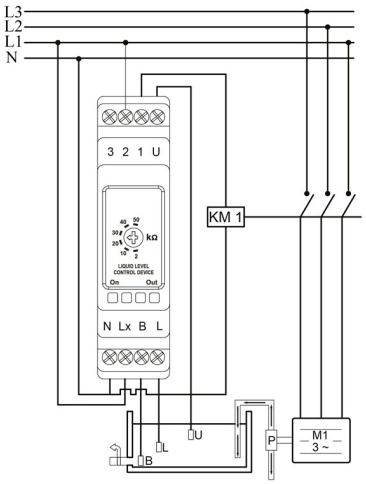


RR3LL01		
Operational Frequency		50/60Hz
Operational Voltage		230VAC
Product		Electronic Relay
Control		Analog
Type		Liquid Level
Mounting		Rail Mount
Contact		1CO
Current	**Ie**	10A (rezistif)
Power Consumption		< 1 VA
Mechanical Life	**Min Qty**	10000000
Electrical Life	**Min Qty**	100000
Impulse Withstand Voltage	**Uimp**	300V
Isolation Resistance		Min. 10 MOhm
Operating Temperature		-5°C...+55°C
Protection Degree		IP20
Output Type		1 pcs relay 10A/250V AC
Sensitivity		2-50 kOhm adjustable
Serial		RR3 Series
Specifications	Compact design	
	Fast and silent switching	
	Long life	
	Fingerproof design	


59
36
91
96
59
23,25


L3
L2
L1
N
3 2 1 U
kΩ
LIQUID LEVEL
CONTROL DEVICE
On
Out
N Lx B L
KM 1
U
L
B
P
M1
3 ~