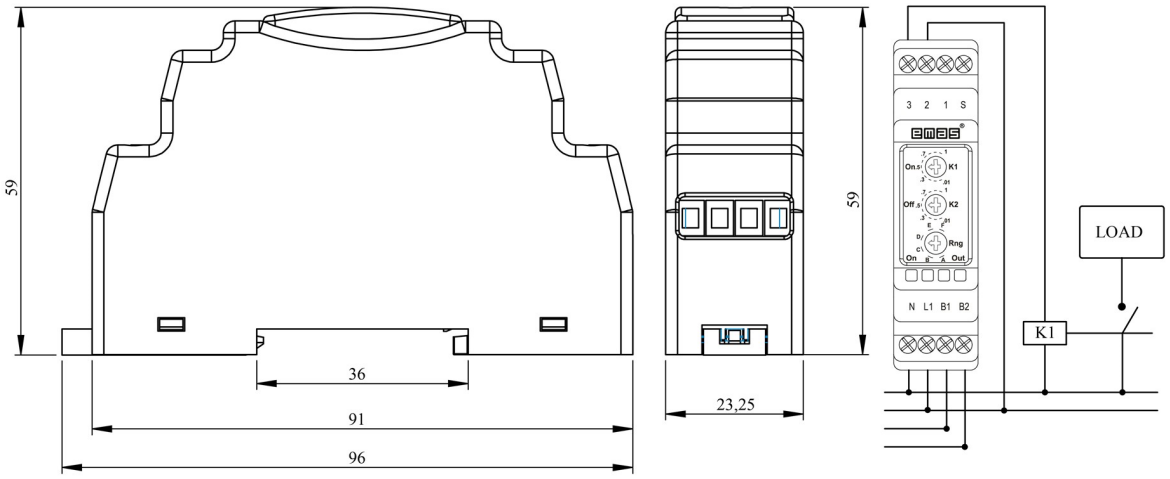
RR3ZTC02		
Operational Frequency		50/60Hz
Operational Voltage		24VAC/DC-230VAC
Product		Electronic Relay
Control		Analog
Type		Time
Feature		Double Time Set
Mounting		Rail Mount
Contact		1CO
Current	**Ie**	10A (rezistif)
Power Consumption		< 7 VA
Mechanical Life	**Min Qty**	10000000
Electrical Life	**Min Qty**	100000
Impulse Withstand Voltage	**Uimp**	300V
Isolation Resistance		Min. 10 MOhm
Operating Temperature		-5°C...+55°C
Protection Degree		IP20
Output Type		1 pcs changeover relay 10A/250V AC
Time Interval		0,06sec-10hour
Serial		RR3 Series
Specifications	Compact design	
	Fast and silent switching	
	Long life	
	Fingerproof design	


59
36
91
96
23,25
59
3 2 1 S
On s
K1
Off s
K2
Rng
On
Out
N L1 B1 B2
LOAD
K1