


## RZ1A2C03S-5

|                       |                           |                  |
|-----------------------|---------------------------|------------------|
| Switching Capacity    |                           | 6000/saat        |
| Connection Type       |                           | 8 Pins           |
| Operating Current     |                           | 0.065A           |
| Operational Frequency |                           | 50 Hz            |
| Operational Voltage   |                           | 230VAC           |
| Product               |                           | Electronic Relay |
| Control               |                           | Analog           |
| Type                  |                           | Time             |
| Contact               |                           | 1CO+1NO          |
| Current               | <b>Ie</b>                 | 5A (rezistif)    |
| Power Consumption     |                           | <13VA            |
| Mechanical Life       | <b>Min Qty</b>            | 10000000         |
| Electrical Life       | <b>Min Qty</b>            | 100000           |
| Operating Temperature |                           | -5°C...+55°C     |
| Protection Degree     |                           | IP30             |
| Contact Material      |                           | AgNi             |
| Time Interval         |                           | 0,1sec-3sec      |
| Maximum Contact Power |                           | 150 W, 1,250 VA  |
| Number of Contact     |                           | 1NO,1 changeover |
| Repeat Accuracy       |                           | ±%3              |
| Max. Reset Time       |                           | ≤100ms           |
| Voltage Interval      |                           | (0,85-1.1)*Ue    |
| Indicator             |                           | Led              |
| Serial                |                           | RZ1 Series       |
| Specifications        | Compact design            |                  |
|                       | Fast and silent switching |                  |
|                       | Long life                 |                  |
|                       | Fingerproof design        |                  |



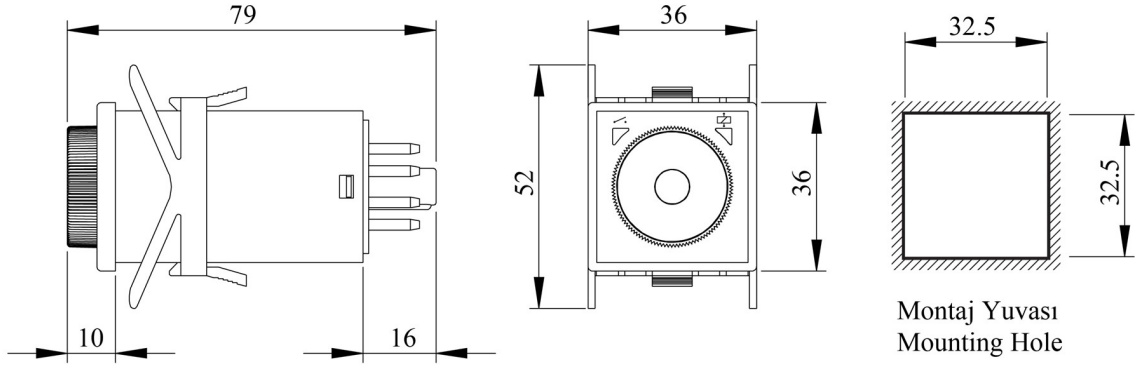

- 2-7 : Besleme (220 V AC) / Supply (220 V AC)  
 Besleme (24 V AC) / Supply (24 V AC)  
 Besleme (12V AC) / Supply (12V AC)
- 1-3 : Ani çıkış kontağı/Instantaneous relay output contact
- 8-5-6 : Zamana bağlı çıkış kontakları / Timed relay output contacts

