



RZ1D1B-2

Switching Capacity		6000/saat
Connection Type		8 Pins
Operating Current		0.035A
Operational Frequency		50 Hz
Operational Voltage		24VAC/DC
Product		Electronic Relay
Control		Digital
Type		Time
Contact		1CO
Current	Ie	5A (rezistif)
Power Consumption		0.7W
Mechanical Life	Min Qty	10000000
Electrical Life	Min Qty	100000
Operating Temperature		-5°C...+55°C
Protection Degree		IP30
Contact Material		AgNi
Time Interval		0,1sec-99,59hour
Maximum Contact Power		1500 VA
Number of Contact		1 changeover
Max. Reset Time		≤100ms
Voltage Interval		(0,85-1.1)*Ue
Indicator		7 Segment Display
Number of Digits		4
Serial		RZ1 Series
Specifications	Compact design	
	Fast and silent switching	
	Long life	
	Fingerproof design	

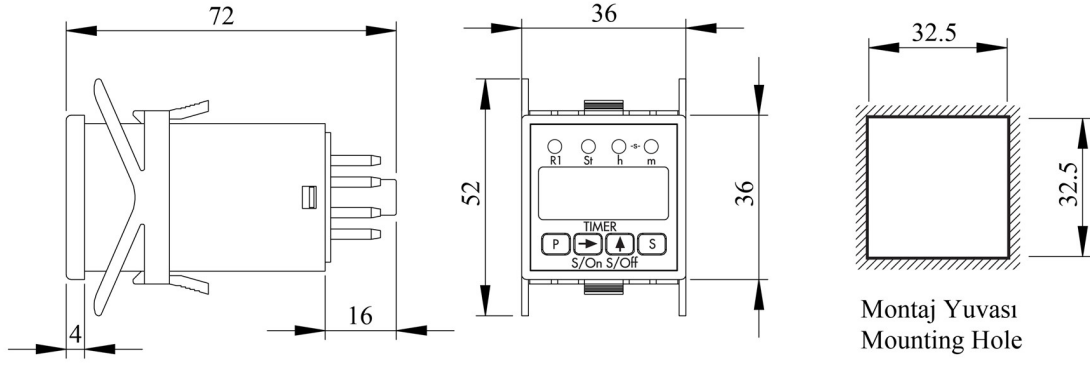

- 2-7 : Besleme / Supply
 1-6 : İnhibit girişı /Inhibit input
 1-8 : Start girişı / Start input
 3-4-5 : Zamana baęlı çıkış kontakları /Timed relay output

Not: Dijital zaman röleleri RS1P08 tipi röle soketiyle kullanıma uygundur.
 Note: Digital time relays can be used with RS1P08 type sockets.