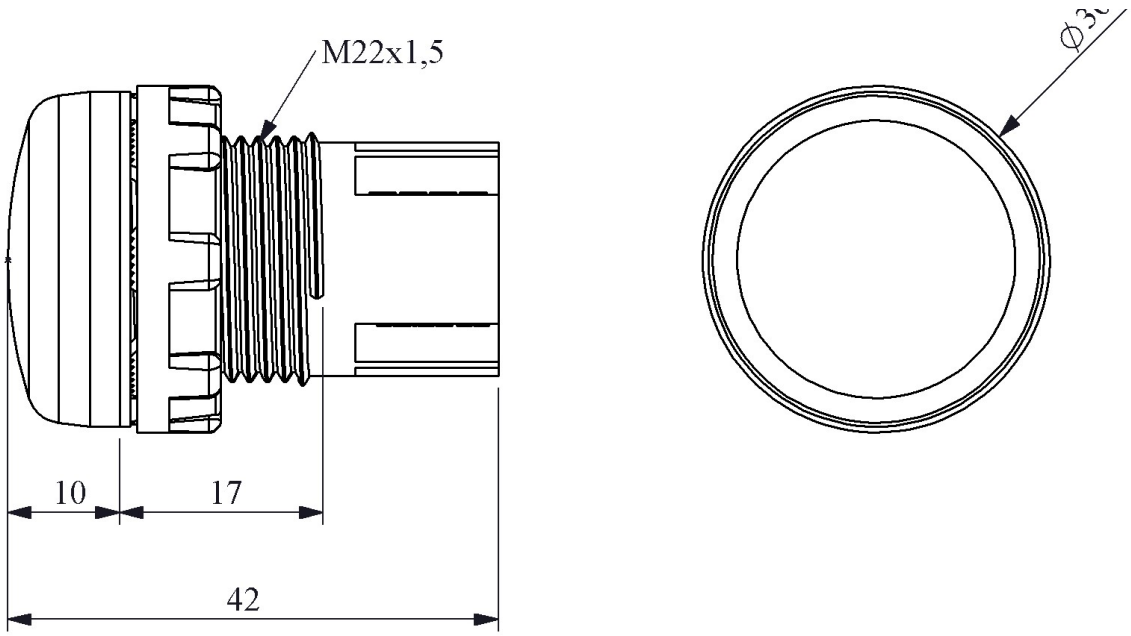
S222LS2

Bulb Type		Led
Operating Current		17 mA
Operational Frequency		50 Hz
Operational Voltage		24V AC/DC
Product		Pilot
Color		Yellow
Illumination		with LED
Dia		22 mm
Power Consumption		0.5 W
Insulation Voltage	**Ui**	250 V
Operating Temperature		-15 / + 70 °C
Protection Degree		IP40
Cable Section		1.5-2.5 mm²
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		S Series Plastic
Electrical Life	**Min Hour**	10000
Specifications	Ø10,14, 22 mm round types	
	Different voltage variety	
	Connection facility with different terminal types	


M22x1,5
10
17
42