


SKF1A-3N		
Product		Level Control Float Switch
Type		Bulb
Feature		With Standard Weight
Cable		3m
Phase Number		1 Phase
Current	**Ie**	6 A (250V AC)
Usage Category		AC15
Mechanical Life	**Min Qty**	30000
Electrical Life	**Min Qty**	10000
Operating Frequency	**On-Off/Hour**	Mek.120 Elk.120
Insulation Voltage	**Ui**	660V
Impulse Withstand Voltage	**Uimp**	2.75 kV
Dielectric Strength (Body-Contact)		2750V AC
Dielectric Strength (Contact-Contact)		1890V AC
Isolation Resistance		10 MΩ MİN. (500 V DC)
Operating Temperature		-15 / + 80 °C
Protection Degree		IP68
Contact Material		AgNi
Cable Section		3*1 mm Kablo
Serial		SKF1A Series
Cable Type		Neoprene
Specifications	Easy assembly	
	Feature to adjust the requested operation interval with weight	
	Different cable lenghth options	
	Waterproof	
Standards / Certificates	TS EN 60730-2-15	



Devre Şeması

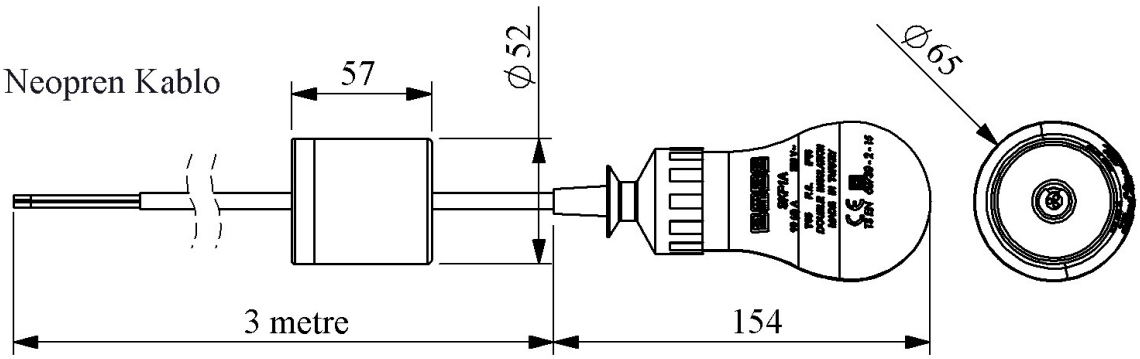