
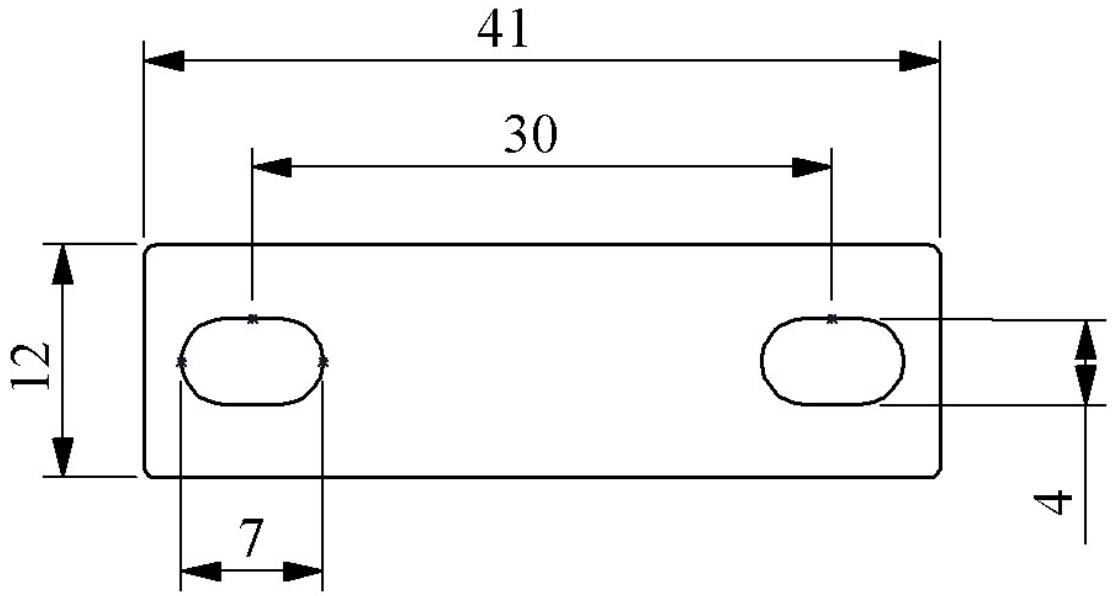


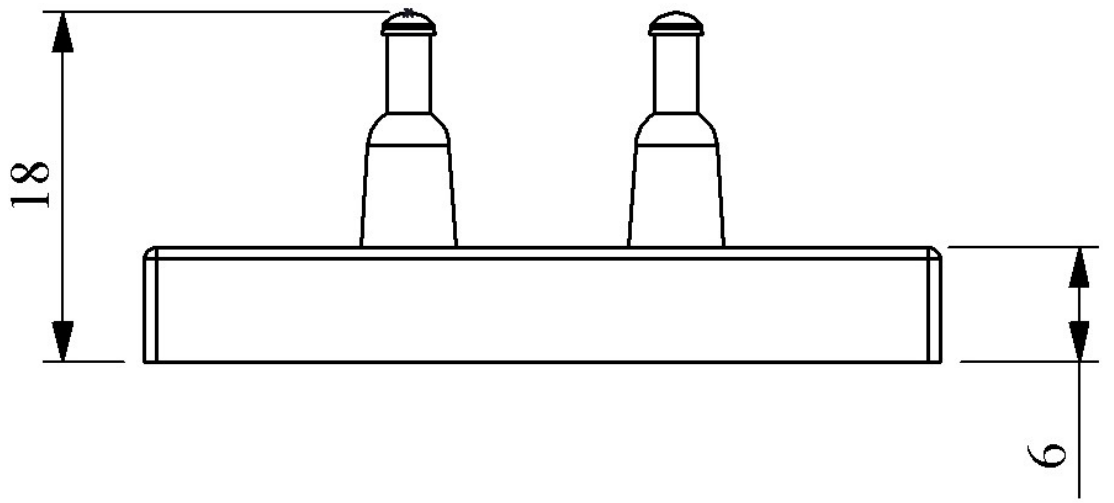

Z70		
Product		Elevator Door Switch
Color		Black
Current	**Ie**	2A (230V AC)
Usage Category		AC15
Mechanical Life	**Min Qty**	5000000
Electrical Life	**Min Qty**	1000000
Operating Frequency	**On-Off/Hour**	Mech. 3000 Elec. 1200
Insulation Voltage	**Ui**	500 V
Impulse Withstand Voltage	**Uimp**	4 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.890V AC
Isolation Resistance		10 MΩ (500 V DC)
Operating Temperature		-15 / + 80 °C
Pollution Degree		3
Protection Degree		IP20
Contact Material		AgNi
Cable Section		1-2.5 mm2
Screw Torque		0,8Nm
Short Circuit Breaking Capacity	**Ics**	1kA
Serial		Z Series
Ingredients		Plug
Standards / Certificates	TS EN 60947-5-1	TS EN 81-20


41
30
12
4
7


18
6