

B101DBOD		
Print		Vertical (Arrow) Sign Marked
Product		Control Unit
Model		Spring
Type		Flush
Contact		2NO
Color		White
Dia		22 mm
Current	**Ie**	4 A (250V AC)
Usage Category		AC 15
Mechanical Life	**Min Qty**	500000
Electrical Life	**Min Qty**	100000
Operating Frequency	**On-Off/Hour**	Mech. 3000 Elec. 1200
Insulation Voltage	**Ui**	300V
Impulse Withstand Voltage	**Uimp**	2.5 kV
Dielectric Strength (Body-Contact)		2.500V AC
Dielectric Strength (Contact-Contact)		1.500V AC
Isolation Resistance		10 MΩ min. (500V DC)
Operating Temperature		-15 / + 80 °C
Pollution Degree		3
Protection Degree		IP50
Contact Material		AgNi
Cable Section		1.5-2.5 mm²
Screw Torque		1,5 Nm
Short Circuit Breaking Capacity	**Ics**	1 kA
Production Time		31.12.1899 00:00:00
Serial		B Series Plastic
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availablity	

	Variety of products for all areas of application
Standards / Certificates	IEC 60947-5-1 TS EN 60947-5-1 UL 508 VDE 0660
	

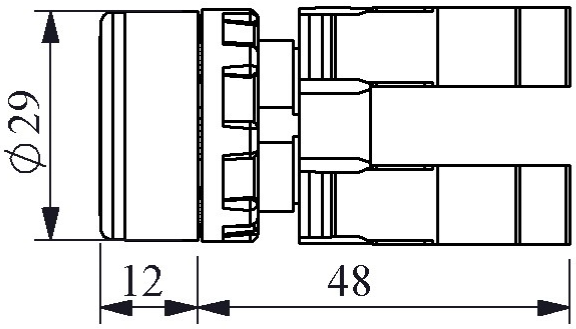

Montaj Ölçüsü Ø22.4 ±0.2 mm

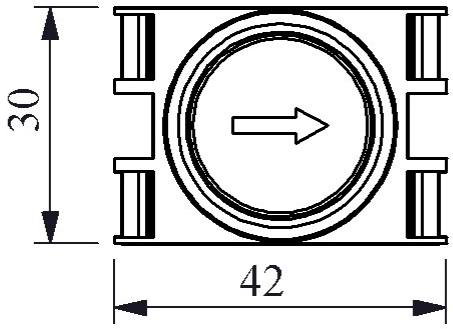

Devre Şeması

